Saw & Benchtop
Tools & Accessories

4100DG-09
10" Worksite Table Saw with Gravity-Rise™ Wheeled Stand and Digital Display

"The best thing about this guard is the engineering that makes it the most user-friendly system I have seen." "Hats off to Bosch for putting this in place..."

Robert W. Lang
PopularWoodworking.com
4100DG-09
August 2, 2007

Section Guide

Tools
Jig Saws 54-56
Power Hand Saws 56
Reciprocating Saws 57
Circular Saws 58-60
Miter Saws 60-63
Table Saws & Stands 64-66

Accessories
Saw Attachments 67-69
Jig Saw Blades 70-84
Reciprocating Saw Blades 85-94
Circular Saw Blades 95-102
Hack/Band Saw Blades 103-104

BOSCH

1590EVSK
Top Handle Jig Saw

Carrying Case Included

Features
- 6.4 Amps
- Precision Control™ system - Eliminates blade wander for precision cuts
- One-Touch™ blade change - One-handed insertion and lever ejection
- Quick bevel adjust cast aluminum foot - Easy to read scale under foot
- Constant Response™ circuitry - Maintains desired speed for consistent performance
- T-shank machined plunger - Robust 3-point connection - no blade play
- On/off blower switch
- 4-position orbital control
- Variable speed trigger
- Variable speed dial
- Lock on button

Specifications

Rating	120V
Amperage	6.4
No Load SPM	500-2,800
Max. Bevel Cut	45°
Cutting Capacity (in.)	
Mild Steel	3/8"
Plastics	1-1/4"
Stainless Steel	1/8"
Stroke Length (in.)	1"
Weight (lbs.)	6

Includes
Precision for Wood Blade T144DP
Progressor® Wood Blade T123X
Tight Kerf Blade T244D
Zero-Clearance Insert ..... 2 601 016 087 (Included)
Non-Marring Footplate 2 608 000 309
Carrying Case 2 610 991 718

See pages 70–78, 83–84 for **jig saw** accessories.

1591EVSK
Barrel Grip Jig Saw Kit

Carrying Case Included

Features
- 6.4 Amps
- Precision Control™ system - Eliminates blade wander for precision cuts
- Soft Grip Ergonomic Barrel Grip Body - For precise control and cutting
- One-Touch™ blade change - One-handed insertion and lever ejection
- Constant Response™ circuitry - Maintains desired speed for consistent performance
- Fully Counterbalanced Mechanism - Fast and easy bevel cutting
- Wrenchless Foot with tension adjustment - To minimize vibration
- Easy access On/Off Switch
- Smooth non-marring base cover - Protects delicate surfaces
- Four Position Orbital Action - Smooth to aggressive cuts
- Lock on button - Adjustable dust blower keeps cutting line clear

Specifications

Rating	120V
Amperage	6.4
No Load SPM	500-2,800
Max. Bevel Cut	45°
Cutting Capacity (in.)	
Mild Steel	3/8"
Plastics	1-1/4"
Stainless Steel	1/8"
Stroke Length (in.)	1"
Weight (lbs.)	6

Includes
Precision for Wood Blade T144DP
Progressor® Wood Blade T123X
Tight Kerf Blade T244D
Anti-Splinter Insert 2 601 016 087
No-Mar Footplate 2 608 000 309
Carrying Case 2 610 991 718

See pages 70–78, 83–84 for **jig saw** accessories.

1587AVSK
Top Handle Jig Saw with Case

Carrying Case Included

Features
- Powerful 5 Amp motor, 500-3100 SPM
- Tool-free blade change system - For fast and easy blade changes
- Exclusive multi-directional blade clamp mechanism - For superior blade hold
- Low-vibration design - Ensures extremely smooth operation
- 4-Stage orbital action adjusts blade motion - To match workpiece and cutting task
- Low position roller guide - Ensures blade stability and precise cutting
- 3-Position dust blower
- Variable speed control dial - Sets maximum speed and trigger controls operating speed
- Adjustable die-cast aluminum footplate

Specifications

Rating	120V
Amperage	5.0
No Load SPM	500-3,100
Max. Bevel Cut	45°
Cutting Capacity (in.)	
Aluminum	3/4"
Mild Steel	3/8"
Plastics	1-1/4"
Wood	3-3/8"
Stainless Steel	1/8"
Length (in.)	10-5/8"
Stroke Length (in.)	1"
Weight (lbs.)	5.5

Includes
Three Assorted Blades T101DP, T118A, T144D
Footplate Adjustment Hex Key 1 907 950 006
Steel Footplate Insert Kit 2 601 098 011
Anti-Splintering Insert JA1002
No-Mar Plastic Footplate Insert Kit 2 610 996 230
Carrying Case 2 610 991 718

Optional Equipment
Metal Case 2 610 910 063

See pages 70–78, 83–84 for **jig saw** accessories.

1587AVSP

Top Handle Jig Saw with Case & Bonus Blades

Specifications

Rating	120V
Amperage	5.0
No Load SPM	500-3,100
Max. Bevel Cut	45°
Cutting Capacity (in.)	
Aluminum	3/4"
Mild Steel	3/8"
Plastics	1-1/4"
Wood	3-3/8"
Stainless Steel	1/8"
Length (in.)	10-5/8"
Stroke Length (in.)	1"
Weight (lbs.)	5.5

Includes

Bonus ..... 9 assorted blades (T101DP, T118A, T144D, T101AO, T101BK, T118G, T123K, T234X, T345XF)
Footplate Adjustment
Hex Key 1 907 950 006
Steel Footplate Insert Kit 2 601 098 011
Anti-Splintering Insert JA1002
No-Mar Plastic Footplate
Insert Kit 2 610 996 230
Carrying Case 2 610 991 718

Features

- Powerful 5 Amp motor, 500-3100 SPM
- Tool-free blade change system - For fast and easy blade changes
- Exclusive multi-directional blade clamp mechanism - For superior blade hold
- Low-vibration design - Ensures extremely smooth operation
- 4-Stage orbital action adjusts blade motion - To match workpiece and cutting task
- Low position roller guide - Ensures blade stability and precise cutting
- 3-Position dust blower
- Variable speed control dial - Sets maximum speed and trigger controls operating speed
- Adjustable die-cast aluminum footplate

See pages 70–78, 83–84 for **jig saw** accessories.

Carrying Case Included

1584AVSK

Barrel Grip Jig Saw with Case

Specifications

Rating	120V
Amperage	5.0
No Load SPM	500-3,100
Max. Bevel Cut	45°
Cutting Capacity (in.)	
Aluminum	3/4"
Mild Steel	3/8"
Plastics	1-1/4"
Wood	3-3/8"
Stainless Steel	1/8"
Length (in.)	10-5/8"
Stroke Length (in.)	1"
Weight (lbs.)	5.5

Includes

Three Assorted Blades T101DP, T118A, T144D
Footplate Adjustment
Hex Key 1 907 950 006
Steel Footplate Insert Kit 2 607 001 085
Anti-Splintering Insert JA1002
No-Mar Plastic Footplate
Insert Kit 2 610 996 230
Metal Carrying Case 2 610 991 718

Optional Equipment

Dust Extraction Hood 2 610 994 544

Features

- Powerful 5 Amp motor, 500-3100 SPM
- Tool-free blade change system - For fast and easy blade changes
- Exclusive multi-directional blade clamp mechanism - For superior blade hold
- Low-vibration design - Ensures extremely smooth operation
- 4-stage orbital action adjusts blade motion - To match workpiece and cutting task
- Low position roller guide - Ensures blade stability and precise cutting
- 3-position dust blower
- Variable speed dial - Match speed to workpiece and task
- Adjustable die-cast aluminum footplate
- Rotating handle - Provides comfort when cutting intricate patterns

See pages 70–78, 83–84 for **jig saw** accessories.

Carrying Case Included

1581AVSK

Top Handle Jig Saw with Case

Specifications

Rating	120V
Amperage	5.0
No Load SPM	500-3,100
Max. Bevel Cut	45°
Cutting Capacity (in.)	
Aluminum	3/4"
Mild Steel	3/8"
Plastics	1-1/4"
Wood	3-3/8"
Stainless Steel	1/8"
Length (in.)	10.6"
Stroke Length (in.)	1"
Weight (lbs.)	5.5

Includes

Three Assorted Blades T101DP, T118A, T144
Footplate Adjustment
Hex Key 1 907 950 006
Anti-Splintering Insert JA1002
Blade Locking Screwdriver JA1001
Metal Carrying Case 2 610 991 718

Optional Equipment

Blade Lock Screw 2 603 400 000

Features

- Powerful 5 Amp motor, 500-3100 SPM
- Exclusive multi-directional blade clamp mechanism - For superior blade hold
- Low-vibration design - Ensures extremely smooth operation
- 4-stage orbital action adjusts blade motion - To match workpiece and cutting task
- Low position roller guide - Ensures blade stability and precise cutting
- 3-position dust blower
- Variable speed control dial sets maximum speed and trigger - Controls operating speed
- Adjustable steel footplate

See pages 70–78, 83–84 for **jig saw** accessories.

Carrying Case Included

NEW! JS5
Orbital Jigsaw

Carrying Bag Included

Features
- One-Touch™ blade change Provides one handed insertion and blade ejection
- 5.7amps, 500-3100 SPM
- Variable speed dial – Match speed to work piece and task
- 4 position orbital action – Smooth to aggressive cuts
- Adjustable dust blower keeps cutting line clear
- Soft grip handle and body adds comfort and control
- Counterbalanced Drive System minimizes vibration
- Includes: Carrying Bag, Blade and Allen Key

Specifications

Rating	120V
Amperage	5.7
No Load SPM	500-3,100
Max. Bevel Cut	45°
Cutting Capacity (in.)	
Aluminum	3/4"
Mild Steel	3/8"
Wood	3-9/16"
Stroke Length (in.)	1"
Weight (lbs.)	5.1

Includes
Blade T144D
Anti-Splintering Insert JA1002
Allen Wrench ..... Included
Carrying Bag 2 610 922 842

See pages 70–78, 83–84 for **jig saw** accessories.

1640VS
Finecut™ Power Handsaw

FINECUT™ POWER HANDSAW SYSTEM

Features
- Versatile flush-cutting ability - Ideal tool for flush cutting doorjambs, window jams, shims, PVC drainpipe, flooring and more.
- 3.5 Amps, 2,000-2,800 RPM
- Precision sawing, including flush cutting in wood, wood composites and plastics
- Variable speed - Allows user to match speed to workpiece and task
- Blades mount on left or right side - For excellent visibility and total versatility
- Tool-free blade change system - For quick, easy blade changes
- Counter-balanced - For reduced vibration
- Ergonomic design - Provides comfortable handling even in tight working areas
- Large on/off switch is integrated with gripping surface - For easy access

Specifications

Rating	120V
Amperage	3.5
No Load SPM	2,000-2,800
Cutting Capacity (in.)	
Plastics	3/4"
Wood	2-1/2"
Length (in.)	11-7/8"
Stroke Length (in.)	5/8"
Weight (lbs.)	3.5

Includes
Fine-Tooth Blade FS180ATU
Fine-Tooth/ Flush-Cut Blade FS200ABU

Optional Equipment
Power Handsaw Blades FS180DTU

See page 68 for **saw** attachments.

1640VSK
Finecut™ Power Handsaw Kit

FINECUT™ POWER HANDSAW SYSTEM

Features
- Versatile flush-cutting ability - Ideal tool for flush cutting doorjambs, window jambs, shims, PVC drainpipe, flooring and more.
- 3.5 Amps, 2,000-2,800 RPM
- Precision sawing, including flush cutting in wood, wood composites, and plastics - Variable Speed
- Flush-cutting ability - Allows user to match speed to workpiece and task
- Blades mount on left or right side - For excellent visibility and total versatility
- Tool-free blade change system - For quick, easy blade changes
- Counter-balanced - For reduced vibration
- Ergonomic design - Provides comfortable handling even in tight working areas
- Miter table attachment - Converts tool into precise cut-off and miter saw
- Built-in mitering stops - Set angles of 0°, 15°, 22.5°, 30°, and 45° on both sides
- Miters materials up to 3-5/8" tall

Specifications

Rating	120V
Amperage	3.5
No Load SPM	2,000-2,800
Cutting Capacity (in.)	
Plastics	3/4"
Wood	2-1/2"
Length (in.)	11.9"
Stroke Length (in.)	5/8"
Weight (lbs.)	3.5

Includes
Fine-Tooth Blade FS180ATU
Fine-Tooth, Flush-Cut Blade FS200ABU
Coarse-Tooth Blade FS180DTU
Carrying Case 2 605 438 139
Miter Table Attachment FS2000
Two Table Clamps 2 607 960 008
Work Piece Clamp 2607 960 010

Optional Equipment
Power Handsaw Blades FS180DTU

See page 68 for **saw** attachments.

RS15
1-1/4" Reciprocating Saw

Specifications

Rating	120V
Amperage	12
No Load SPM	0 - 2,800
Length (in.)	17.5"
Stroke Length (in.)	1-1/4"
Weight (lbs.)	8.2

Includes
All Purpose Blade SAPP6
Wood with Nails Blade SWN6
Carrying Case 2 610 918 095

See pages 85–94 for **reciprocating saw** accessories.

Features
- 12 Amps
- Bosch Lockjaw™ blade system - Allows for one handed blade insertion and ejection.
- Brute™ drive system - Provides proven durability, endurance and power
- Saw hook - Allows convenience tool storage between cuts
- Swivel cord - Allows mobility and provides strain relief
- Variable speed trigger - Gives precision blade speed control
- Soft, comfortable, ergonomic grip
- Foot adjustment - Push button design allows easy foot positioning
- Blade Holder - Allows up or down cutting
- Soft grip boot - Provides user sure under-hand and over-hand cutting

Carrying Case Included

RS10
3/4" Reciprocating Saw

Specifications

Rating	120V
Amperage	12
No Load SPM	0-2,800
Length (in.)	17.5"
Stroke Length (in.)	3/4"
Weight (lbs.)	8.2

Includes
All Purpose Blade SAPP6
Heavy Metal Blade SHMS7
Carrying Case 2 610 918 095

See pages 85–94 for **reciprocating saw** accessories.

Features
- 12 Amps
- Bosch Lockjaw™ blade system - Allows for one handed blade insertion and ejection
- Brute™ drive system - Provides proven durability, endurance and power
- Saw hook - Allows convenience tool storage between cuts
- Swivel cord - Allows mobility and provides strain relief
- Variable speed trigger - Gives precision blade speed control
- Soft grip - Provides ergonomic feel for end user comfort
- Foot adjustment - Push button design allows easy foot positioning
- Soft grip boot - Provides user sure under-hand and over-hand cutting

Carrying Case Included

RS5
1-1/8" Reciprocating Saw

Specifications

Rating	120V
Amperage	10
No Load SPM	0-2,700
Length (in.)	17"
Stroke Length (in.)	1-1/8"
Weight (lbs.)	7.2

Includes
All Purpose Blade SAPP6
Carrying Case 2 610 921 067

See pages 85–94 for **reciprocating saw** accessories.

Features
- 10 amps
- 360° scroll collar - Allows user to get into hard to reach areas
- Quick change blade system - Easily changes blades with no additional tools
- Saw hook - Convenient saw storage between cuts
- Variable speed trigger - Easily control the rate of cut
- Blade holder - Allows for up or down cutting
- Soft grip boot - Provides user sure under-hand and over-hand cutting
- Soft grip - Provides ergonomic feel for end user comfort
- Pivoting shoe - Provides work surface stability

Carrying Case Included

CS20
7-1/4" Circular Saw with Direct Connect™

Carrying Bag Included

DIRECT CONNECT™ CORD MANAGEMENT SYSTEM

Features
- 15 Amp motor
- Direct Connect™ Cord Management System - Saves user time and money on jobsite with no end-plug snagging, easy cord repairs, and easy tool storage
- High strength composite footplate - For unmatched durability and flatness
- 56° Bevel
- Saw hook - Convenient saw storage between cuts
- Powerful blower to clear dust in line of cut
- Unmatched line of sight
- High strength and lightweight magnesium upper and lower guards
- Anti-snag lower guard
- Adjustable bevel and depth levers - For years of consistent locking
- Removable end cap - Easy, serviceable brushes
- Textured soft grip
- Heavy duty 22 amp switch
- Spindle lock

Specifications

Rating	120V
Amperage	15
No Load RPM	5,600
Blade Diameter (in.)	7-1/4"
Bevel Stops	22.5°, 45°
Arbor Size	5/8"
Depth of Cut (in.)	
at 90°	2-7/16"
at 50°	1-5/8"
at 45°	1-7/8"
Weight (lbs.)	10.4

Includes
24 Tooth Carbide Blade..... CB724AB
Carrying Bag 2 610 914 300

Optional Equipment
Extension Cords..... XC25, XC50
Rip Fence.....WD7RIP

See pages 95–102 for **circular saw** accessories.

BOSCH Direct Connect™
Cord management system.

- Plug any 12-gauge extension cord into the tool
- Saves user time and money
- No end plug snagging
- Easy cord repairs
- Easy tool storage

DIRECT CONNECT™ CORD MANAGEMENT SYSTEM

Step 1: Bend cord to insert

Step 2: Loop cord over hook

Step 3: Insert plug

CS10
7-1/4" Circular Saw

Carrying Bag Included

Features
- 15 Amp motor
- High-strength composite footplate - For unmatched durability and flatness
- 56° Bevel
- Powerful blower to clear dust in line of cut
- High strength and lightweight magnesium upper guard
- Anti-snag lower guard
- Adjustable bevel and depth levers - For years of consistent locking
- High contrast bevel and depth scales - For greater accuracy
- On-tool wrench storage - Fast and easy blade changes
- Removable end cap - Easy, serviceable brushes
- Textured soft grip
- Heavy duty 22 amp switch
- 10' long cord
- Spindle lock

Specifications

Rating	120V
Amperage	15
No Load RPM	5,600
Blade Diameter (in.)	7-1/4"
Bevel Stops	22.5°, 45°
Arbor Size	5/8"
Depth of Cut (in.)	
at 90°	2-7/16"
at 50°	1-5/8"
at 45°	1-7/8"
Weight (lbs.)	10.2

Includes
24 Tooth Carbide Blade..... CB724AB
Carrying Bag 2 610 914 300

Optional Equipment
Rip Fence.....WD7RIP

See pages 95–102 for **circular saw** accessories.

1656
8-1/4" Circular Saw

Specifications

Rating	120V
Amperage	15
No Load RPM	5,500
Blade Diameter (in.)	8-1/4"
Arbor Size	5/8"
Depth of Cut (in.)	
at 90°	2-15/16"
at 50°	1-5/8"
at 45°	1-3/4"
Length (in.)	12"
Weight (lbs.)	13

Includes
24-Tooth Carbide-Tipped Blade ...Included
Blade Wrench..... 2 610 351 201

Optional Equipment
Rip Fence..... 2 610 025 341
Metal Case..... 3 605 438 539

See pages 95–102 for **circular saw** accessories.

Features
- 15 Amp ball bearing motor, 5,500 RPM
- Precision cut helical steel gears
- Large, easy-to-reach adjustment levers
- 60° bevel capacity with positive stop at 45°
- High-strength, alloy steel footplate
- Built-in blade wrench storage
- Footplate scale
- Spindle lock

1677MD(T)
7-1/4" Worm Drive Construction Saw

Specifications

Rating	120V
Amperage	15
No Load RPM	4,400
Blade Diameter (in.)	7-1/4"
Arbor Size	Diamond Arbor
Depth of Cut (in.)	
at 90°	2-3/8"
at 50°	1-13/16"
at 45°	1-15/16"
Weight (lbs.)	14

Includes
24-Tooth Carbide Blade WD724B

Optional Equipment
Extension Cords..... XC25, XC50
Rip Fence.....WD7RIP

See pages 95–102 for **circular saw** accessories.

Features
- Powerful 15 amp all ball-bearing motor
- Direct Connect™ Cord Management System - Saves user time and money on jobsite with no end-plug snagging, easy cord repairs, and easy tool storage.
- Left side blade view - For unmatched line of sight and blade visibility
- Saw hook - For easy storage between cuts
- Anti-snag lower guard - To minimize snagging in wood
- Die cast magnesium footplate - For greater strength
- 50° bevel capacity with positive stop at 45°
- Magnesium housing
- Easy serviceable brushes
- Texture soft grip
- Spindle Lock

1677MDT *also features*
- Twist lock plug

DIRECT CONNECT™ CORD MANAGEMENT SYSTEM

Worm Drive Construction Saws
The Industry Standard. Redefined.

Unmatched Accuracy, Power, and Durability Combine for Long-Lasting Performance.
Taller, deeper gear teeth maximize contact and raise load capacity, generating massive strength for even the most demanding jobs. Left-sided blade placement clears your line of sight, and a rigid motor housing eliminates blade wobble for accurate cuts, every time. Independent testing proves that the Worm Drive gear design lasts four times longer than any conventional design to date.

XC25 25-FT. 12/3 AWG Contractor Extension Cord
XC50 50-FT. 12/3 AWG Contractor Extension Cord

1677M

7-1/4" Worm Drive with Rear Handle Construction Saw

Features

- Left side blade design - Unmatched line of sight and blade visibility
- Powerful 15 Amp
- All ball-bearing motor with worm drive gear train
- Built-in saw hook - For easy storage between cuts
- Anti-snag lower guard - To minimize snagging in wood
- Die cast magnesium footplate - For greater strength
- 50° bevel capacity with positive stop at 45°
- Magnesium housing
- Large adjustment levers
- Easy serviceable brushes
- Soft grip handle
- Spindle Lock

Specifications

Rating	120V
Amperage	15
No Load RPM	4,400
Blade Diameter (in.)	7-1/4"
Arbor Size	Diamond
Depth of Cut (in.)	
at 90°	2-3/8"
at 50°	1-13/16"
at 45°	1-15/16"
Weight (lbs.)	14

Includes

24 Tooth Carbide Blade.....WD724B
Built-in Saw Hook.....Included
Blade Wrench.....Included

Optional Equipment

Worm Drive Rip Fence.....WD7RIP
Worm Drive Lubricant WD7LUB

See pages 95–102 for **circular saw** accessories.

5412L

12" Dual-Bevel Slide Miter Saw with Up-Front Controls & Laser Tracking


DANGER
LASER RADIATION - AVOID DIRECT EYE EXPOSURE
WAVELENGTH: 650 nm
Max. Output: < 5 mW
CLASS IIIa LASER PRODUCT
COMPLIES WITH FDA 21CFR1040.10 AND 1040.11

Features

- Up-Front Bevel Lock Lever and Range Selector Knob - Easily-accessed controls for quick and accurate bevel settings
- Arbor mounted laser tracking - Provides accurate laser lines for precision cutting
- Multi-Position Main Handle - Easily locks into any of four positions for optimum comfort and control
- Large 25-1/2" Base with Built-In Cast Sliding Extensions for 40" total length
- Tall 4-1/2" Speed-Track Sliding Fences - For easy bevel set-ups and increased crown molding cutting capacities
- Built-in Length Stop - For quick repetitive cuts of the same length
- Easily Readable Bevel and Miter Scales - For easy setting of accurate bevel and miter angles
- Exclusive Wedge-and-Slot Miter Detent System - Consistent and precise miter angles over the life of the tool
- Miter Detent Override - For fast and precise angle adjustment
- Crown Molding Settings - 31.6° miter and 33.9° bevel detents for quick, accurate crown cuts
- Dual Sliding Rail Design - For superior accuracy
- Electric Brake - For quick, repetitive cuts. Stops blade in seconds

Specifications

Rating	120V
Amperage	15
No Load RPM	3,800
Max. Tool HP	3.0
Blade Diameter (in.)	12"
Arbor Size	1"
Height (in.)	20"
Weight (lbs.)	59
Bevel Angle Range	47° to 47°
Bevel Detents	0°, 33.9°, 45° Left/Right
Miter Angle Range	52° Left / 60° Right
Miter Detents	0°, 15°, 22.5°, 31.6°, 45°, (Left/Right) 60° (Right)
Crown Molding - Angled Against Fence	6" max.
Crown Molding - Laying Flat	10-1/4" (90° corner when molding has a 38° "spring" angle from wall) using 31.6° miter and 33.9° bevel stops
Base Molding - Against Fence	4-1/4" max.
Base Molding - Laying Flat	12"
Miter/Bevel(Max Height x Width)	
0°/0° -	4-1/4" x 12-1/2" (4 x 12 Nominal)
0°/45° right -	1-3/4" x 12-1/2" (2 x 12 Nominal)
0°/45° left -	2-3/4" x 12-1/2" (2 x 12 Nominal)
45°/0° -	4-1/4" x 8-3/4" (4 x 8 Nominal)
45°/45° right -	2-5/8" x 8-3/4" (2 x 8 Nominal)
45°/45° left -	2-3/4" x 8-3/4" (2 x 8 Nominal)

Includes

Premium 60-Tooth Thin-Kerf Carbide-Tipped Blade CB1260
Wrench Set.....Included
Tool-Free Verticle Work Clamp.....MS1226
Dust Bag/Elbow MS1225
Arbor Laser/3x Battery..... 2 610 924 646

Optional Equipment

Gravity-Rise™ Wheeled Stand..... T4B
TracRac® Portable Stand w/Wheels T3B
Horizontal Quick Clamp Crown Stop Bracket.....MS1221
Extra-Long Base Rod Kit MS1222
Length Stop Kit.....MS1223
Kerf Insert.....MS1224
Vacuum Adaptor (35mm Hose)..... VAC003

4410L

10" Dual-Bevel Slide Miter Saw with Up-Front Controls & Laser Tracking

Specifications

Rating	120V
Amperage	15
No Load RPM	4,800
Max. Tool HP	3.0
Blade Diameter (in.)	10"
Arbor Size	5/8"
Height (in.)	19"
Weight (lbs.)	55
Length (in.)	37-1/4"
Bevel Angle Range	47° left and 46° right
Miter Detents	10
Crown Molding - Angled Against Fence	6"
Crown Molding - Laying Flat	31.6° stops up to 10-1/4"
Base Molding - Against Fence	4-1/4"
Miter/Bevel(Max Height x Width)	
0°/0° -	3-5/8" x 12-1/4" (4 x 12 Nominal)
45°/0° -	3-5/8" x 8-3/4" (4 x 8 Nominal)
45°/45° -	2-1/4" x 8-3/4" (2 x 8 Nominal)
45°/45° right -	1-1/4" x 8-3/4" (2 x 8 Nominal)

Includes

Premium 60-Tooth Thin-Kerf Carbide-Tipped Blade CB1060L
Wrench Set ..... Included
Tool-Free Verticle Work Clamp MS1226
Dust Elbow/Dust Bag MS1232
Arbor Laser/3x Battery 2 610 924 646
Multi-Purpose Tool ..... Included

Optional Equipment

Gravity-Rise™ Wheeled Stand T4B
TracRac® Portable Stand w/Wheels T3B
Horizontal Quick Clamp MS1221
Stock Support Extension System .. MS1227
Crown Molding Support Stop (2) .. MS1228
Length Stop Kit MS1230
Kerf Insert MS1224
Vacuum Adaptor (35mm hoses) VAC004
Quick Action Clamp BB1200

Features

- Up-Front bevel lock lever and range selector knob - Easily-accessed controls for quick and accurate bevel settings
- Arbor mounted laser tracking - Provides accurate laser lines for precision cutting
- Microfine miter adjustment knob - For fine adjustment of key (detent) miter angles by up to 2°, left or right
- Multi-positioned main handle - Easily locks into any of four positions for optimum comfort and control
- Large 21" aluminum base with cast sliding extensions for 37-1/4" total length - Provides extended grip areas and extra support for longer materials
- Easily readable bevel and miter scales - For easy setting of accurate bevel and miter angles
- Tall 4" Speed-Track Sliding Fences - For easy bevel set-ups and increased crown molding cutting capacities
- Miter detent override - Holds miter detent lever away from table for free rotation or engagement of Microfine Miter Adjustment feature
- Crown miter detents - 31.6° miter and 33.9° bevel detents for quick, accurate crown cuts
- Exclusive Wedge-and-Slot Miter Detent System - Consistent and precise miter angles over the life of the tool
- Electric brake - For quick, repetitive cuts. Stops blade in seconds
- Spindle Lock - For fast, easy blade changes
- Dual slide rail design - For superior accuracy


DANGER
LASER RADIATION - AVOID DIRECT EYE EXPOSURE
WAVELENGTH: 650 nm
Max. Output: < 5 mW
CLASS IIIa LASER PRODUCT
COMPLIES WITH FDA 21CFR1040.10 AND 1040.11

4212L

12" Dual-Bevel Compound Miter Saw with Up-Front Controls & Laser Tracking

Specifications

Rating	120V
Amperage	15.0
No Load RPM	3,800
Max. Tool HP	3.0
Blade Diameter (in.)	12"
Arbor Size	1"
Weight (lbs.)	55
Length (in.)	25" to 37-1/4" (extended)
Bevel Angle Range	47° left and 47° right
Crown Molding - Angled Against Fence	5-1/4"
Crown Molding - Laying Flat	6-5/8" using 3.16 ° miter and 33.9° bevel
Miter/Bevel(Max Height x Width)	
0°/0° -	2-1/2" x 8" (2 x 8 Nominal)
0°/45° right -	1-1/2" x 6" (2 x 6 Nominal)
0°/45° left -	2-7/8" x 7-7/8" (2 x 8 Nominal)

Includes

40-Tooth Thin-Kerf Carbide-Tipped Blade CB1240
Dust bag and elbow MS1232
Flip-up Crown Stops MS1233
Multi-purpose tool ..... Included
Wrench Set ..... included
Arbor-Laser Kit/3x battery ... 2 610 924 646
Vertical Quick Clamp MS1226

Optional Equipment

Gravity-Rise™ Wheeled Stand T4B
TracRac® Portable Stand w/wheels T3B
Horizontal Quick Clamp MS1221
Stock Support Extension System .. MS1227
Crown Molding Support Stop MS1228
Extra Long Base Rod Kit MS1229
Length Stop Kit MS1230
Kerf Insert MS1231
Vacuum Adapter (35mm hoses) VAC004

Features

- Up-Front bevel lock lever and range selector knob - Easily accessed controls for quick and accurate bevel settings
- Arbor mounted laser tracking - Provides accurate laser lines for precision cutting
- Built-in flip storage crown stops
- Multi-position main handle - Easily locks into any of four positions
- Large 25-1/2" Base with built-in cast sliding extensions for 40" total length
- Tall 4-1/2" Speed-Track Sliding Fences - For easy bevel set-ups and increased crown molding cutting capacities
- Ambidextrous lock-off release button
- Built-in length stop - For repetitive cuts of the same length
- Easily readable bevel and miter scales - For easy setting of accurate bevel and miter angles
- Exclusive Wedge-and-Slot Miter Detent System - Consistent and precise miter angles over the life of the tool
- Miter detent override - For fast adjustment and precise angle
- Crown molding settings - 31.6° miter and 33.9° bevel detents for quick, accurate crown cuts
- Electric brake - For quick, repetitive cuts. Stops blade in seconds


DANGER
LASER RADIATION - AVOID DIRECT EYE EXPOSURE
WAVELENGTH: 650 nm
Max. Output: < 5 mW
CLASS IIIa LASER PRODUCT
COMPLIES WITH FDA 21CFR1040.10 AND 1040.11

3912
12" Compound Miter Saw

Features
- Powerful 15 Amp motor, 3.3 max. tool HP
- Crown miter detents - 31.6° Miter and 33.9° Bevel detents for quick, accurate, crown cuts
- Large 25" aluminum base with 3-1/4" sliding extension for 28-1/4" total length - Provides extra support
- Speed-Track Sliding Fence System - Base and fence slide independently
- Tall 5-1/8" sliding fence - For easy bevel setups and increased crown molding cutting capacities
- Exclusive Wedge-and-Slot Miter Detent System - Consistent and precise miter angles over the life of the tool
- Miter detent override - For easy setting of any neighboring angle
- Cast and machined scales - Visible for the life of the saw
- Electric brake - For quick, repetitive cuts. Stops blade in seconds.
- Spindle lock - For fast easy blade changes

Specifications

Rating	120V
Amperage	15.0
No Load RPM	4,300
Max. Tool HP	3.3
Blade Diameter (in.)	12"
Arbor Size	1"
Height (in.)	17"
Weight (lbs.)	43
Bevel Angle Range	-3° to 45°
Bevel Detents	33.9°, 45°, 0°
Miter Angle Range	52° Left/52° Right
Miter Detents	0°, 15°, 22.5°, 31.6°, 45° L/R
Crown Molding - Angled Against Fence	6-5/8" (38° Spring / 90° Corner)
Crown Molding - Laying Flat	6-5/8" (38° Spring / 90° Corner)
Base Molding - Against Fence	5-3/8"
Miter/Bevel(Max Height x Width)	
0°/0° -	3-3/4" x 6-3/8" (4 x 6 Nominal)
0°/45° -	2-3/4" x 6-3/8" (3 x 6 Nominal)
45°/0° -	3-7/8" x 4-1/4" (4 x 4 Nominal)
45°/45° -	2-3/4" x 4-1/4" (3 x 4 Nominal)
Miter/Bevel(Max Width x Height)	
0°/0° -	7-7/8" x 2-7/8" (3 x 8 Nominal)
0°/45° -	7-7/8" x 2" (2 x 8 Nominal)
45°/0° -	5-1/2" x 2-7/8" (3 x 6" Nominal)
45°/45° -	5-1/2" x 2" (2 x 6 Nominal)

Includes
Quick-Action Clamp BB1200
40 Tooth Carbide Blade 2 610 910 836
Blade and Stop Wrench ..... Included
Fence and Base Wrench ..... Included
Dust Bag BB1205
Directional Dust Chute 2 610 910 845

Optional Equipment
Gravity-Rise™ Wheeled Stand T4B
TracRac® Portable Stand w/Wheels T3B
Table Insert BB1201
Pipe Extension Kit with Workpiece Support Stop BB1202
Crown Molding Support BB1203
Extension and Stock Stop BB1204
Vacuum Adaptor (35mm hose) VAC003

NEW! 4405
10" Single Bevel Slide Compound Miter Saw with Up-Front Controls

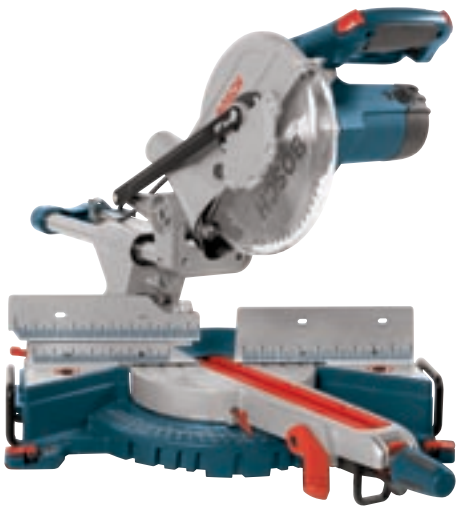

Features
- Up-Front Controls - Exclusive feature provides easy and efficient access to miter and bevel angle settings
- Quick Release Fence – For fast and easy adjustment
- Dual Workpiece Supports – Extends material support from 21" (53.3 cm) to 36" (91.4 cm)
- Exclusive Wedge-and-Slot Miter Detent System – Consistent and precise miter angles over the life of the tool
- High Visibility Bevel and Miter Scales – For easy setting of accurate bevel and miter angles
- Crown Miter Detents - 31.6° miter and 33.9° bevel detents for quick and accurate crown cuts
- Miter Detent Override – Enables miter cuts at any angle in saw's range
- Soft-grip Horizontal Handle with Ambidextrous Lockout- For comfortable repetitive cuts
- Spindle Lock – For fast, easy blade changes

Specifications

Rating	120V
Amperage	13
No Load RPM	4,700
Max. Tool HP	2.8
Blade Diameter (in.)	10"
Arbor Size	5/8"
Height	20.63"
Weight of Saw (lbs.)	54
Length (in.)	35.93"
Bevel Angle Range	45° left to 0°
Bevel Detents	33.9° left with positive stops at 0° and 45°
Miter Angle Range	52° to left, 60° to right
Miter Detents	0°, 15°, 22.5°, 31.6°, 45° left and right, and 60° right
Crown Molding Angled	4-1/4" - 38°
Crown Molding Laying Flat	10-1/4"
Base Molding Flat	12"
Base Molding Angled	3-1/2"
Miter/Bevel(Max Height x Width)	
0°/0° -	3-1/2" x 12" (4 x 12 Nominal)
45°/0° right -	3-19/32" x 8" (4 x 8 Nominal)
0°/45° left -	2-1/4" x 12" (3 x 12 Nominal)
45°/45° -	2-1/4" x 8" (3 x 8 Nominal)

Includes
10" 60- Tooth Carbide-Tipped Blade CB1060L
Tool Free Workpiece Clamp. 2 610 950 455
Blade Change Wrench ..... Included
Dust Bag MS1232

Optional Equipment
Gravity-Rise™ Wheeled Stand T4B
TracRac® Portable Stand w/Wheels T3B
Vacuum Adaptor (35mm hose) VAC004

Specifications

Rating	18V
No Load RPM	3,600
Blade Diameter (in.)	10"
Arbor Size	5/8"
Height (in.)	14"
Weight (lbs.)	30
Bevel Angle Range	-2° to 47°
Crown Molding - Angled Against Fence	4-1/4" (38° Spring / 90° Corner)
Crown Molding - Laying Flat	5-1/4" (38° Spring / 90° Corner)
Base Molding - Against Fence	4-1/4"
Base Molding - Laying Flat	5-1/4"
Miter/Bevel(Max Height x Width)	
0°/0° -	3-1/2" x 3-1/2"
0°/45° -	2" x 4-1/4"
45°/0° -	3-1/2" x 2-3/4"
45°/45° -	2" x 2-3/4"
Miter/Bevel(Max Width x Height)	
0°/0° -	2-1/2" x 5-1/2"
0°/45° -	1-3/8" x 5-1/2"
45°/0° -	3-3/4" x 2-1/2"
45°/45° -	3-3/4" x 1-3/8"

Includes

2.4A-h BlueCore™ Battery BAT180
1-Hour Charger BC004
10" 24-Tooth Circular Saw Blade .. CB1024
Material Clamp 2 610 933 742
Wrench Blade ..... Included
Dust Bag BB1208

Optional Equipment

Gravity-Rise™ Wheeled Stand..... T4B
TracRac® Portable Stand w/Wheels T3B
Table Insert BB1207
Extension and Stock Stop..... BB1204
Crown Molding Support..... BB1203
1-Hour Automatic Charger..... BC006
15 min. Charger BC016

Features

- 18 volt BlueCore™ Technology, 3600RPM
- Crown miter detents - 31.6° miter and 33.9° bevel detents for quick accurate crown cuts
- Large 20-3/4" aluminum base with 3-1/4" sliding extension for 24" total length - Provides extra support
- Speed Track Sliding Fence System - Base and fence slide independently
- Tall 3-1/2" sliding fence - For easy bevel set-ups and increased crown molding cutting capacities
- Exclusive Wedge-and-Slot Miter Detent System - Consistent and precise miter angles over the life of the tool
- Miter detent override - For easy setting of any neighboring angle
- Cast and machined scales - Visible for the life of the saw
- Electric brake - For quick repetitive cuts. Stops blade in seconds
- Spindle lock - For fast, easy blade changes
- Double insulated, UL listed, complies to OSHA

3918

18V Cordless 10" Compound Miter Saw Kit with BlueCore™ Technology

DWM40L(K)

Miterfinder™ Digital Protractor

See page 218 for more information.

T3B
TracRac® Miter Saw Stand

Features
- Integrated Outfeed and Supports - Up to 18 feet of material support capacity
- Adjustable Telescoping Leveling Leg - Provides stability on uneven surfaces
- Adjustable Height Outfeed - Up to 12 inches
- Universal Mounting System - For use with all major competitors' saws
- Integrated Rubber Wheels - Easily move stand with saw attached from jobsite to jobsite.

Specifications

Capacity	18 ft. of material
Length	
4.5 ft. Retracted, 9.5 ft. Extended	
Width	
12 inches of work support width, 15.5 ft. total outfeed width	
Weight (lbs.)	44

Includes

4-ft. Dual Outfeeds	Included
Crown Stop	Included
4-in. Rubber Wheels	Included
12-in. Adjustable Height Supports	Included
Universal Mounting Brackets	Included
Adjustable Telescoping/ Leveling Leg	Included

NEW! T4B
Gravity-Rise™ Wheeled Miter Saw Stand

Features
- Gravity-Rise™ Stand – Patented design for easy miter saw set-up and take down
- Universal Rapid-Release Tool Mounts – Fits most competitors' tools. Remove saw from the stand without tools. Rubber feet protect table or bench tops
- Expansion Rails – Expands material support up to 16 ft.
- Built-in Adjustable Repetitive Stops – Saves time and adapts stand to application
- 8" Treaded Pneumatic Wheels – Handles the toughest jobsite terrains
- Exceptional Portability – Quick and easy wheeled transport between jobsites without ever taking the saw off the stand
- Work Support Height Adjustment – Ultimate flexibility to accommodate different saws
- Adjustable Leveling Feet – For uneven terrain
- Heavy Duty Construction
- Collapsible Design – Minimizes storage space requirements
- One Step Set-Up - Takes the work out of setting up and taking down the saw

Specifications

Wheel Diameter	8"
Stand Composition	Steel
Vertical Height of Stand	48.42"
Horizontal Height of Stand	34-1/2"
Weight of Stand (lbs.)	76.7
Width	27-3/4"
Length	51-1/2"
Length extended	103.15"
Material Capacity	16ft

Includes

Gravity-Rise™ Miter Saw Stand with Wheels	T4B
Universal Rapid-Release Tool Mounts (2)	2 610 948 622

Workshop Performance

The Jobsite Demands

The Bosch Portable Jobsite Table Saws deliver workshop performance the jobsite demands. A 15-Amp motor and 3,650 RPM neatly rip 4' x 8' sheets in half with a 25" table capacity and cross cut the finest woods for cabinet or woodworking projects. Nothing beats the convenience and portability of the Bosch Gravity-Rise™ Stand.

Innovative New Features

The Smart Guard System is the first modular blade guard, including a three-position adjustable Riving Knife, Anti-Kickback Pawls and Barrier Guard. The entire system attaches and detaches in seconds, will not interfere with work and stores on the tool. The new Digital Measuring Display attaches to the SquareLock™ Rip Fence to increase productivity and eliminate material waste. The durable subbase handles the worst jobsite elements. Built-in carry-handles offer better portability.

Specifications

Rating	120V
Amperage	15
No Load RPM	3,650
Max. Motor HP	4.0
Blade Diameter (in.)	10"
Arbor Size	5/8"
Weight of Saw (lbs.)	60
Weight of Saw with Stand (lbs.)	99
Extend Width of Table Top	40.5"
Rip Fence Capacity	25"
Depth of Cut at 90°	3-1/8"
Bevel Range	-2° to 47°
Table Top Dimensions	29" x 21-1/2"

Includes

10" 40-Tooth Carbide-Tipped Blade 2 610 996 872
Rip Fence..... 2 610 950 148
Miter Gauge..... 2 610 950 149
Smart Guard System 2 610 950 092
Push Stick..... 2 610 950 112

Optional Equipment

See pages 66 & 67.

NEW! **4100**

10" Worksite Table Saw

Features

- Smart Guard System – Quick and easy-to-use modular blade guard, anti-kickback pawls and riving knife system provides superior control over the material while cutting
- Large 29" X 21-1/2" Machined Aluminum Tabletop – Easily handles bigger stock for wide ripping capacity.
- SquareLock™ Rip Fence – Engineered for maximum trueness
- Integrated Sub-base – Increases tool life by handling jobsite abuse, while protecting the table saw's base
- Soft Start and Constant Response™ Circuitry – For quiet /smoother start-up and powerful torque while maintaining speed under load.
- On-tool storage for all saw attachments and tools, including Smart Guard System, Fence and Miter Gauge and Push Stick.
- Exclusive Arbor Lock - For single wrench blade changes

NEW! 4100-09

10" Worksite Table Saw with Gravity-Rise™ Wheeled Stand

4100-09 *also features*

- Gravity-Rise™ Stand – Patented for easy set-up and take down of your table saw
- Exceptional Portability – Quick and easy transport between jobsites
- Heavy Duty Construction – Built to last with powder coat paint finish for longevity
- 8" Treaded Pneumatic Wheels – Handles the toughest and unexpected jobsite terrains
- Collapsible Design – Minimizes storage space requirements

Includes

Gravity-Rise™ Table Saw Stand TS3000

NEW! 4100DG-09

10" Worksite Table Saw with Digital Measuring Display and Gravity-Rise™ Wheeled Stand

Digital Measuring Display

4100DG-09 *also features*

- Digital Measuring Display – Precise and durable high-visibility LCD gauge and display that magnetically attaches to SquareLock™ Ripe Fence. Measures within 1/32" or .5 mm for accurate cuts
- Gravity-Rise™ Stand – Patented for easy set-up and take down of your table saw
- Exceptional Portability – Quick and easy transport between jobsites
- Heavy Duty Construction – Built to last with powder coat paint finish for longevity
- 8" Treaded Pneumatic Wheels – Handles the toughest and unexpected jobsite terrains
- Collapsible Design – Minimizes storage space requirements

Includes

Gravity-Rise™ Table Saw Stand TS3000
Digital Measuring Display DC010

TS2000

Gravity-Rise™ Wheeled Table Saw Stand

Features

- 8" Treaded Pneumatic Wheels - Handles rough terrain
- Universally Adaptable - Mounting holes for competitors' table saws - DeWalt, Makita, Hitachi, Craftsman, Ridgid
- Gravity-Rise™ Stand - Patented design for easy table saw setup and table down
- Exceptional Portability - Quick and easy transport between job sites
- Heavy Duty Construction - Withstands 250 lbs. of downward force

Specifications

Wheel Diameter	8"
Height	24-1/2"
Material	1.5mm steel
Weight (lbs.)	53

TS1003
Left Side Support
Extends 12" and increases working width of table to 52".

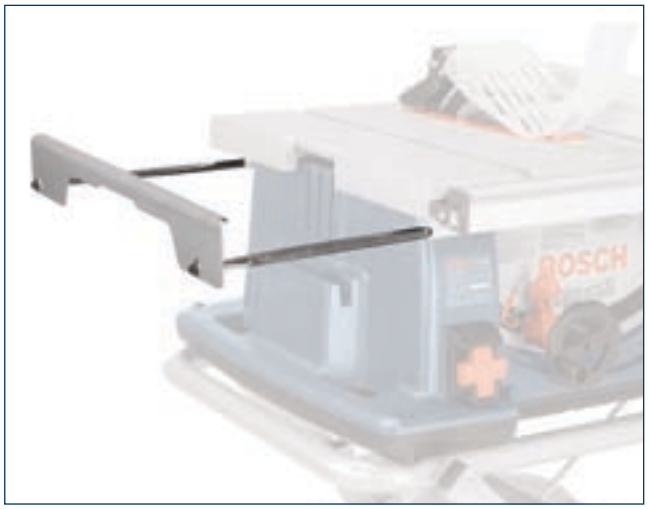

TS1002
Rear Outfeed Support
Extends 18" and increases working depth of table to 39-1/2".

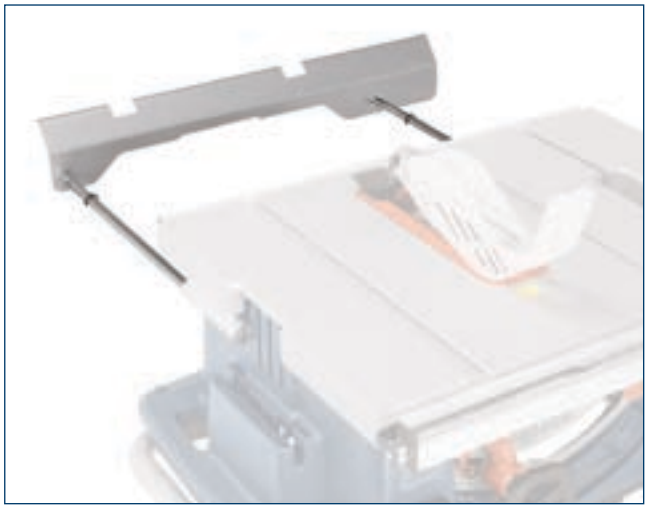

DC010
Digital Carriage Display
(4100-Series Table saws)
Precise and durable high-visibility LCD gauge and display magnetically attaches to SquareLock™ Rip Fence. Measures within 1/32" or 0.5mm for accurate cuts.

TS1004
Table Saw Dust Collection System
Keeps work area clean, easily attached and emptied.

TS1005
Table Saw Zero Clearance Insert
For precision cuts at 90°, reduces kerf clearance to thickness of blade.

TS1007
Table Saw Dado Cutter Insert
For use with stack dado/ rabbet cutters.

TS1009
Molding Cutter Insert
For use with molding head cutters and adjustable hub dado cutters.

TS1010
Table Saw Pusher/Scale
10 tools in one: pusher, scales, angles, depth, center locator.

TS1011
Blade/Wrench Storage Tote
Stores 3 blades, 2 pencils, blade wrench and guard/rip fence wrench. (4000-Series only)

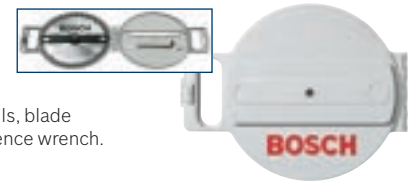

Jig Saws

2 602 317 031 Guide Rail
- Fits Models 1584AVS, 1587AVS

1 602 319 003 Guide Rail Connector
- Fits Models 1584AVS, 1587AV

JA1003 Circular & Parallel Cutting Guide
- Fits Models 1584AVS, 1587AVS, 1590EVS, 1591EVS and JS5.

JA1005 Dust Extraction Kit
- Dust Hood
- Suction Nozzle
- Vacuum Adapter - VAC002
- Fits Models 1590 and 1591 series jig saws

Item #	Description
VAC002	Connects 1-1/4" or 1" hoses to tools that have ports for 35mm hoses)

JA1001 Screwdriver
- Fits Models 1581AVS

0 603 999 007 Pocket Saw
- Accepts all brands of T-Shank blades, overall length 6"
- Includes Jigsaw blade T313AW and Reciprocating saw blade S644D

2 607 001 082 Guide Rail Adapter
- Fits Models 1584AVS, 1587AVS

1 607 960 008 Guide Rail Clamps
- Used with Jigsaw Guide Rail System

JA1002 Anti-Splintering Insert (5 pkg.)
- Fits Models 1581AVS, 1584AVS and 1587AVS

2 603 400 000 Blade Locking Screw for Jig Saws
- Fits Models 1581AVS, 1581AVSK

2 610 910 063 Metal Case
- Fits All Jigsaw Models

2 610 914 154 Plastic Case
- Fits All Electric Jig Saw Models

Power Hand Saws

Power Hand Saw Blades
- Ideal for thick and thin materials
- High-alloy steel (HAS) blades with hardened ground teeth
- Ultra-fine teeth design provides smooth, tear-free cuts
- Flex-resistant, steel blade guides provide accurate guidance

FS180ATU

FS200ABU

Item #	Blade Length	Teeth Per Inch	Blade Material	Blade Capacities:
FS180ATU	5-3/4"	20	High Alloy Steel (Fine Tooth)	Wood/PVC 2-1/2", Plastic 3/4"
FS180DTU	5-3/4"	8	High Alloy Steel (Coarse Tooth)	Wood/PVC 2-1/2", Plastic 3/4"
FS200ABU	7-7/8"	20	High Alloy Steel (Fine Tooth)	Wood/PVC 1-1/2"
FS200ABF	7-7/8"	20	Bi-Metal (Fine Tooth)	Wood/PVC 1-1/2", Non-ferrous Metal 1/8"

Circular Saws

WD7HDC Worm Drive Handle Direct Connect™ Conversion Kit
- Converts worm drive saws into Direct Connect™ worm drives
- Uses standard 12-gauge extension cords
- Plug 12-gauge extension cord directly into saw
- Direct Connect™ puts an end to cut power cords, snags, and end pulls
- Pre-assembled for easy installation
- Includes switch and all replacement screws
- Fits all Bosch Worm Drive Construction Saws

WD7HDT Worm Drive Twist Lock Handle Direct Connect™ Conversion Kit
- Converts worm drive saws into Direct Connect™ worm drives
- Uses Twist Lock extension cords
- Plug 12-gauge extension cord directly into saw
- Direct Connect™ puts an end to cut power cords, snags, and end pulls
- Pre-assembled for easy installation
- Includes switch and all replacement screws
- Fits all Bosch Worm Drive Construction Saws

MS1221 Horizontal Quick Clamp
- Fits Models 4410, 4410L, 4412 and 5412L

BB1200, BB1206 and MS1226 Quick Clamps

Item #	Description	Fits Models
BB1200	Quick-Action Clamp	3912
BB1206	Quick-Action Clamp	3918
MS1226	Replacement Vertical Quick Clamp	4410, 4410L, 4412 and 5412L

BB1203 Crown Molding Support
- Fits Models 3912 and 3918

MS1228 Support Kit
- Fits Models 4410, 4410L, 4412 and 5412L

BB1202 Work Piece Stop for 1/2" Pipe Extension
- Fits Model 3912

BB1204 12" Extension Wing Kit (2) with (1) Stop
- Fits Models 3912 and 3918

MS1223 Length Stop Kit
- Fits Models 4412 and 5412L

MS1230 Length Stop Kit
- Fits Models 4410 and 4410L

MS1222, MS1229 Extension Rod Kit and Extra-Long Rods

Item #	Description	Fits Models
MS1222	Extra-Long Base Extension Rod Kit	4412 and 5412L
MS1229	Extra-Long Rods	4410 and 4410L

2 610 907 853 Blade and Bevel Stop Wrench
- Fits Model 3918

2 610 910 828 Blade and Stop Wrench
- Fits Model 3912

1 907 950 004 3mm Allen Key
- Fits Model 3918,
- Underscribe Base 3 605 702 625 and Bevel Stop Wrench

2 610 355 777 6mm Allen Key
- Fits Model 3912, 3918
- Base and Fence Wrench

MS1224, MS1231, BB1201 and BB1207 Replacement Kerf Inserts

Item #	Description	Fits Models
MS1224	Replacement Kerf Inserts	4412 and 5412L
MS1231	Replacement Kerf Inserts	4410 and 4410L
BB1201	Replacement Kerf Inserts	3912
BB1207	Replacement Kerf Inserts	3918

BB1209, 2 610 910 845 Directional Dust Chute and Vacuum Hose Adapter

Item #	Description	Fits Models
BB1209	Directional Dust Chute and Vacuum Hose Adapter	Used with VAC004 or standard 2-1/2" vacuum hoses
2 610 910 845	Directional Dust Chute	3912

BB1205, BB1208 Dust Bags and MS1232, MS1225 Dust Bag Kits

Item #	Description	Fits Models
BB1205	Dust Bag	3912
BB1208	Dust Bag	3918
MS1232	Dust Bag Kit	4410 and 4410L
MS1225	Replacement Dust Bag Kit	4412 and 5412L

BB1210 Tote Bag
- Fits Model 3918

Jig Saw Blades

As the world's largest jig saw tool and blade manufacturer, Bosch understands the demands of cutting materials quickly, smoothly and precisely. Bosch's optimized jig saw blade configurations cut precisely and easily in conventional and specialized materials.

Blade configurations include **Progressor® tooth design** for superior performance in speed and cleanliness of cut, **plunge blade tip shapes** for easy plunge cutting in wood, **longer blades** for deep sandwich material cuts and **flexible blades** that provide strength in curve and angle cutting.

Bosch makes it easy for you to quickly find the blade that best fits the job with simple **color coding and blade applications** that are identified on each blade. For the professional that requires technical detail, **key blade specifications** are provided such as overall length and working length, blade materials, tooth design, angles and pitch (teeth per inch (**TPI**)).

Teeth (TPI)

Every material has a different thickness. To achieve the best possible cutting quality and the fastest cutting time, it is important to match material thickness with the proper blade geometry. Always keep 2-3 teeth in material while cutting.



Progressor® Patented Tooth Design

The Progressor® name comes from the progressive tooth pattern that graduates from high to low teeth per inch over the length of the blade. The progressive tooth pattern is engineered so the blade can cut both thick and thin material cleanly and smoothly. The Progressor® line of blades are the ideal blades when switching from one material thickness to another, eliminating the need for blade changes and saving time on the job. Available for wood, metal or all purpose applications.

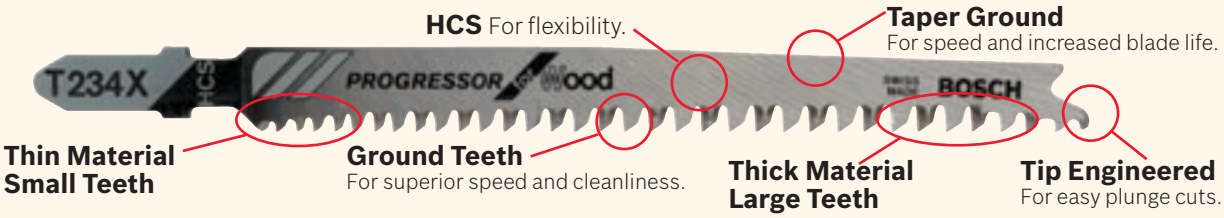

Match the Blade to the Job

High Carbon Steel (HCS)

Excellent blades for softer materials such as wood, laminated particleboard and plastics.

High Speed Steel (HSS)

Fully hardened high speed steel blades are ideal for cutting metal, aluminum and non-ferrous metal.

Bi-Metal (BiM)

This highly flexible, tough combination of HSS and HCS results in a blade suitable for the most demanding applications when there is a risk of breakage or when extreme flexibility and versatility are required.

LASTS 10X LONGER THAN HIGH CARBON STEEL™ LASTS 2X LONGER THAN HIGH SPEED STEEL™

Tungsten Carbide (TC)

Use blades with tungsten carbide teeth to cut abrasive materials such as reinforced plastics, fiberglass, cement board and stainless steel. Use blades coated with tungsten carbide grit to cut abrasive materials such as tile, glass, cast iron and brick.

LASTS 10X LONGER THAN BI-METAL™

Tooth Design

Bosch blades are designed with optimal tooth spacing, tooth shape and cutting angle to give you the best possible speed, cleanliness of cut and optimal performance.



Side Set & Milled
For fast, rough cuts in wood and plastics.

Side Set & Ground
For clean, fast cuts in wood and plastics.



Wavy Set & Milled
For cuts in metal, non-ferrous metal, aluminum and plastics.



Ground & Taper Ground
For precise, fine, clean cuts in wood.

Color Code

Bosch jig saw blades are now color coded by application: Blue for Metal, White for All Purpose, Gray for Wood, and Black for Specialty applications. Within each color, more detailed applications have been identified to further simplify blade selection.

Gray HCS — Wood

Bosch has designed a blade for every cutting application in wood, plywood, particleboard and laminated board. Whether you are looking for splinter-free operation, smooth curves, speed or rough cuts, Bosch has designed and developed the right tooth configuration for the job.

PROGRESSOR for Wood
Fast and clean cuts through thick and thin wood.

basic for Wood
Economical blades for quick cutting through soft and hard wood.

speed for Wood
Fast, coarse cuts for hard and soft wood.

special for Laminate
Splinter-free cuts in laminate flooring.

speed for HardWood
Bi-Metal blades for fast, coarse cuts and long life in soft and hard wood and various types of wood building boards.

clean for Wood
Clean, fine cuts for soft and hard wood and plastic.

clean for HardWood
Bi-Metal blades for clean, fine cuts and long life in soft and hard wood and various types of wood building boards.

precision for Wood
Thick body blades for accurate, parallel cuts in thick materials, eliminating blade wander.

Blue BIM — Metal

For all cutting applications in metal, sheet metal, non-ferrous metal and aluminum. Ideal for cutting thin or thick material, curves, straight lines or fast cuts.



PROGRESSOR for Metal
Fast cuts and long life in thick or thin metal, pipes and metal profiles.

basic for Metal
Economical blades for straight cutting through metal.

flexible for Metal
Bi-Metal blades for long life, flexibility and resistance to breakage for cutting metal.

special for Aluminum
Fast cutting for non-ferrous metal.

flexible for Aluminum
Bi-Metal blades for long life, flexibility and resistance to breakage when cutting non-ferrous metals.

White BIM — All-Purpose

Specially designed to give high performance and quality when cutting different materials, so you don't have to change blades mid-job.



PROGRESSOR for All Purpose
Progressive tooth design for thick or thin materials including wood, wood with nails, plastic and aluminum.

accurate for Wood and Nails
Bi-Metal blades for fast cuts and long life in soft and hard wood, wood with nails, plastics and non-ferrous metals.

Black HSS — Specialty

Designed to cut where other blades fail. Hi-tech engineering lets you cut stainless steel, tile, glass, brick, rubber, polystyrene, cement board and more.

special for Plexiglas
Clean and fine cuts on Plexiglas.

special for Soft-Material
Knife blade for very soft materials such as rubber, leather and polystyrene.

special for Stainless Steel
Carbide blade for clean, fine cuts in stainless steel and extended life over Bi-Metal blades.

special for Ceramics
Carbide grit blades for curve cutting in wall tile, ceramic and fiberglass.

special for Fiber and Plaster
Carbide tipped blade for fast cutting in abrasive materials like cement board.

special for Solid Surface
Carbide blade for cutting solid surface materials such as Corian®.

Corian is a registered trademark of DuPont.

Application **Wood**

PROGRESSOR for Wood — Fast and clean cuts through thick and thin wood

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight, fine, splinter free, accurate cuts in thick or thin material Hard / soft woods, OSB, particleboard, plywood, laminated particle board	3	**T234X3**	HCS	4-1/2	3-17/32	3/8	0.06	8-12 Progressive
	5	**T234X**	HCS	4-1/2	3-17/32	3/8	0.06	8-12 Progressive
	25	**T234X25**	HCS	4 1/2	3-17/32	3/8	0.06	8-12 Progressive
Ground teeth and taper ground backing	100	**T234X100**	HCS	4-1/2	3-17/32	3/8	0.06	8-12 Progressive

basic for Wood — Economical

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Fast, coarse cuts, ideal for jig saws without orbital action Soft wood, OSB, plywood 7/32" - 2-3/8"	3	**T111C3**	HCS	4	3	03	0.05	8
	5	**T111C**	HCS	4	3	03	0.05	8
Side set & milled								
For curved cuts Soft wood, OSB, plywood 5/64" - 1/4"	3	**T119BO3**	HCS	3-1/4	2-3/16	0.15	0.04	12
	5	**T119BO**	HCS	3-1/4	2-3/16	0.15	0.04	12
Side set & ground								

speed for Wood — Fast cuts

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight & very fast cuts; plunge cuts Hard / soft woods, OSB, plywood 1/4" - 2-3/8"	3	**T144D3**	HCS	4	3	0.28	0.05	5-6 Progressive
	5	**T144D**	HCS	4	3	0.28	0.05	5-6 Progressive
Side set & ground	100	**T144D100**	HCS	4	3	0.28	0.05	5-6 Progressive
Straight & very fast cuts Hard / soft woods, OSB, plywood 1/4" - 4"	5	**T344D**	HCS	6	5	0.36	0.05	6
Side set & ground								
Curved & fast cuts; plunge cuts Hard / soft woods, OSB, plywood 1/4" - 2-3/8"	3	**T244D3**	HCS	4	3	0.24	0.05	5-6 Progressive
	5	**T244D**	HCS	4	3	0.24	0.05	5-6 Progressive
Side set & ground	100	**T244D100**	HCS	4	3	0.24	0.05	5-6 Progressive
Straight & very fast cuts Hard / soft woods up to 5-5/16" thick	3	**T744D**	HCS	7	6	0.35	0.07	6
Side set & ground								

Application **Wood Cont'd.**

speed for HardWood — Fast cuts in hard wood, break resistant and durable	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight & very fast cuts; plunge cuts, long life Hard / soft woods, OSB, plywood, wood with nails 1/4" - 2-3/8" Side set & ground	5	T144DF	Bi-Metal	4	2-3/4	0.3	0.05	5-6 Progressive
Straight & very fast cuts; plunge cuts, long life Hard / soft woods, OSB, plywood, wood with nails 1/4" - 4" Side set & ground	5	T344DF	Bi-Metal	6	5	0.37	0.05	6

clean for Wood — Fine, clean cuts	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight, clean cuts; plunge cuts Hard / soft woods, plywood, OSB and plastics 1/4" - 2-3/8" Ground teeth & taper ground back	5	T101D	HCS	4	3	0.28	0.06	5-6 Progressive
	100	T101D100	HCS	4	3	0.28	0.06	5-6 Progressive
Straight, clean cuts Hard / soft woods, OSB, plywood, 1/4" - 3-3/8"  Ground teeth & taper ground back	5	T301DL	HCS	5	4-1/8	0.36	0.06	6
Straight, medium-fine cuts Hard / soft woods, plywood, laminated particleboard 3/16" - 2-3/8" and plastics 3/16" - 1-1/4" Use anti-splinter guard for splinter free cuts — Ground teeth & taper ground back	5	T301CD	HCS	4-5/8	3-5/8	0.28	0.06	8
Straight, fine cuts; plunge cuts Hard / soft woods, plastics, OSB, plywood, laminated particleboard 3/16" - 1-1/4" Ground teeth & taper ground back	3	T101B3	HCS	4	3	0.28	0.06	10 variable gullet
	5	T101B	HCS	4	3	0.28	0.06	10 variable gullet
	100	T101B100	HCS	4	3	0.28	0.06	10 variable gullet
Reverse tooth for splinter-free cuts on top of workpiece; straight, fine down cuts Laminated particleboard, OSB, plywood, hard / soft woods, plastics 3/16" - 1-1/4" Work without orbital action — Ground teeth & taper ground back	5	T101BR	HCS	4	3	0.28	0.06	10
	100	T101BR100	HCS	4	3	0.28	0.06	10
Curved cutting - pointed teeth for splinter free cuts on both sides of the workpiece Double-sided laminates, laminated particleboard, MDF, hard / soft woods, plywood 5/64" - 3/4" Work without orbital action — Pointed teeth & ground	3	T101A03	HCS	3-1/4	2-5/16	0.17	0.05	20
	5	T101A0	HCS	3-1/4	2-5/16	0.17	0.05	20
	100	T101A0100	HCS	3-1/4	2-5/16	0.17	0.05	20

Application **Wood Cont'd.**

clean for HardWood — Fine clean cuts in hard wood, break resistant and durable

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Long life; straight, fine cuts; plunge cuts Hard / soft woods, plastics, plywood, laminated particleboard 3/16" - 1-1/4" Ground teeth & taper ground back	5	**T101BF**	Bi-Metal	4	3	0.3	0.05	10 variable gullet

special for Laminate — Precise, clean cuts

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight cuts Splinter-free cuts in laminate flooring Pointed teeth & ground	5	**T101BIF**	Bi-Metal	3-1/4	2-5/16	0.30	0.05	14
Curved cuts Splinter-free cuts in laminate flooring Work without orbital action — Pointed teeth & ground	5	**T101AOF**	Bi-Metal	3-1/4	2-5/16	0.19	0.05	20

precision for Wood — Precise cuts, parallel cuts

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Angled cuts; parallel cuts Hard/soft woods, plywood, particleboard, plastics 1/4"-2-3/8" Ground teeth & taper ground back	5	**T101DP**	HCS	4	2-3/4	0.28	0.07	6
Precise right angle cuts through material, plunge cuts Hard/soft woods, laminated particleboard, plywood 3/16"-2" Ground teeth & side set	5	**T144DP**	HCS	4	2-7/8	0.31	0.07	6
Precise right angle cuts through material Hard/soft woods, laminated particleboard, plywood 3/16"-4" Ground teeth & side set	5	**T344DP**	HCS	6	5	0.28	0.07	6

Application **Metal***

PROGRESSOR for Metal — Fast cuts through thick and thin metals

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Fast cuts & long life in thick or thin metal, pipes and metal profiles Sheet metal up to 8 gauge, metal 5/64" - 3/8", stainless steel 1/16" - 1/8", non-ferrous metal 5/64" - 3/4", plastics 1/16" - 1-1/4", fiberglass 3/64" - 3/4" Side set & ground	3	**T123X3**	HSS	4	3	0.34	0.04	10-24 Progressive
	5	**T123X**	HSS	4	3	0.34	0.04	10-24 Progressive
	25	**T123X25**	HSS	4	3	0.34	0.04	10-24 Progressive
	100	**T123X100**	HSS	4	3	0.34	0.04	10-24 Progressive

* If cutting metal, use cutting oil, turpentine or a mixture of turpentine and petroleum oil to cool blade. NOTE: Use only with GFCI protected outlets or adapter.

Application **Metal* Cont'd.**

basic for Metal — Economical

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight cuts Medium-thin metals 1/8" - 1/4" (ferrous and non-ferrous) Wavy set & milled	3	T118B3	HSS	3-5/8	2-5/8	0.30	0.04	11-14 Progressive
	5	T118B	HSS	3-5/8	2-5/8	0.30	0.04	11-14 Progressive
	100	T118B100	HSS	3-5/8	2-5/8	0.30	0.04	11-14 Progressive
Straight cuts in pipes, profiles & sheet metal Medium-thin metals 5/64" - 5/16" (ferrous and non-ferrous), pipes, profiles diameters 5/64" - 3-1/8" Wavy set & milled	5	T318B	HSS	5-1/4	4-1/4	0.30	0.05	14
	100	T318B100	HSS	5-1/4	4-1/4	0.30	0.05	14
Straight cuts Medium-thin metals 5/64" - 7/32" (ferrous and non-ferrous) Wavy set & milled	5	T118E	HSS	3-5/8	2-5/8	0.28	0.05	14-18 Progressive
Straight cuts Sheet metal 10-16 gauge, thin metals 1/16" - 1/8" (ferrous and non-ferrous) Wavy set & milled	3	T118A3	HSS	3-5/8	2-5/8	0.30	0.04	17-24 Progressive
	5	T118A	HSS	3-5/8	2-5/8	0.30	0.04	17-24 Progressive
	100	T118A100	HSS	3-5/8	2-5/8	0.30	0.04	17-24 Progressive
Curved cuts Sheet metal 10-16 gauge, thin metals 1/16" - 1/8" (ferrous and non-ferrous) Wavy set & milled	5	T218A	HSS	3-5/8	2-5/8	0.25	0.04	17-24 Progressive
Straight cuts in pipes, profiles & sheet metal Sheet metal 10-16 gauge, thin metals 1/16" - 1/8" (ferrous and non-ferrous), pipes <2-1/2" diameter, tube stock, angle iron Wavy set & milled	5	T318A	HSS	5-1/4	4-7/64	0.37	0.04	24
	100	T318A100	HSS	5-1/4	4-7/64	0.37	0.04	24
Straight cuts Sheet metal 17-26 gauge, very thin metals 1/64" - 3/64" (ferrous and non-ferrous) For material thickness under 3/64" use a thin piece of wood as backing Wavy set & milled	5	T118G	HSS	3-5/8	2-5/8	0.30	0.04	36

flexible for Metal — Break resistant and durable

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight cuts & long life Medium-thin metals 1/8" - 1/4" (ferrous and non-ferrous) Wavy set & milled	5	T118BF	Bi-Metal	3-5/8	2-5/8	0.30	0.04	11-14 Progressive
	100	T118BF100	Bi-Metal	3-5/8	2-5/8	0.30	0.04	11-14 Progressive
Straight cuts & long life Medium-thin metals 5/64" - 7/32" (ferrous and non-ferrous) Wavy set & milled	5	T118EF	Bi-Metal	3-5/8	2-5/8	0.30	0.04	14-18 Progressive
	100	T118EF100	Bi-Metal	3-5/8	2-5/8	0.30	0.04	14-18 Progressive

* If cutting metal, use cutting oil, turpentine or a mixture of turpentine and petroleum oil to cool blade. NOTE: Use only with GFCI protected outlets or adapter.

Application **Metal* Cont'd.**

flexible for Metal — Break resistant and durable

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight cuts & long life Sheet metal 10-16 gauge, thin metals 1/16" - 1/8" (ferrous and non-ferrous) Wavy set & milled	5	T118AF	Bi-Metal	3-5/8	2-5/8	0.30	0.04	17-24 Progressive
	100	T118AF100	Bi-Metal	3-5/8	2-5/8	0.30	0.04	17-24 Progressive
Straight cuts & long life Clean cuts in sandwich materials, structural insulated panels, metal, non-ferrous metal, aluminum and sheet metal, up to 4-3/4" Wavy set & milled	3	T718BF	Bi-Metal	7	6	0.40	0.07	14

special for Aluminum — Aluminum and non-ferrous metals

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Fast, straight cuts Aluminum 3/16" - 5/8", fiberglass 3/16" - 3/4", plastic 3/16" - 1-1/4" Side set & milled	5	T127D	HSS	4	3	0.30	0.04	8
	100	T127D100	HSS	4	3	0.30	0.04	8
Fast, curved cuts Aluminum 3/16" - 5/8", fiberglass 3/16" - 3/4", plastic 3/16" - 1-1/4" Side set & milled	5	T227D	HSS	4	3	0.25	0.04	8

flexible for Aluminum — Flexible for aluminum

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Fast, straight cuts & long life Aluminum 3/16" - 5/8", fiberglass 3/16" - 3/4", plastic 3/16" - 1-1/4" Side set & milled	5	T127DF	Bi-Metal	4	3-5/8	0.30	0.04	8
	100	T127DF100	Bi-Metal	4	3-5/8	0.30	0.04	8

Application **All Purpose**

PROGRESSOR for Wood and Metal — Fast and clean cuts through wood with nails and other sandwich material

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Progressive tooth design for fast cuts & longer life in thick & thin materials Wood with nails, plywood, particleboard 3/16" - 3-5/8", metal 3/16" - 3/8", non-ferrous metal and aluminum 5/64" - 1-1/4" Side set & milled	3	T345XF3	Bi-Metal	5-1/4	4-1/4	0.39	0.05	5-10 Progressive
	5	T345XF	Bi-Metal	5-1/4	4-1/4	0.39	0.05	5-10 Progressive
	25	T345XF25	Bi-Metal	5-1/4	4-1/4	0.39	0.05	5-10 Progressive
	100	T345XF100	Bi-Metal	5-1/4	4-1/4	0.39	0.05	5-10 Progressive

accurate for Wood with Nails

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight cuts Wood with nails, OSB, plastic 3/16" - 1-1/4" Side set & milled	5	T111CF	Bi-Metal	4	3	0.30	0.04	8

* If cutting metal, use cutting oil, turpentine or a mixture of turpentine and petroleum oil to cool blade. NOTE: Use only with GFCI protected outlets or adapter.

Application **All Purpose Cont'd.**

accurate for Wood with Nails

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Curve cuts Wood with nails, plastic 1/8" -1-1/4", non-ferrous metal and aluminum 1/8" - 1/2" Side set & milled	5	T211HF	Bi-Metal	3	2	0.18	0.04	10

Application **Special**

special for Plexiglas

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Fine & straight cuts Plexiglas 5/64" - 3/4" Ground teeth & taper ground back	3	T101A3	HSS	4	2-3/4	0.28	0.05	14
	5	T101A	HSS	4	2-3/4	0.28	0.05	14

special for Soft-Material — Soft materials

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Fast, coarse cuts Cardboard, leather, carpet, polystyrene, other soft materials Ground	3	T113A3	HCS	4	3	0.28	0.05	KNIFE EDGE
Fast, coarse cuts Cardboard, leather, carpet, polystyrene, other soft materials Serrated edge	3	T313AW3	HCS	6	5	0.47	0.04	KNIFE EDGE

special for Stainless Steel — Stainless steel

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight cuts, long life Stainless steel 5/64" - 3/16", steel and non-ferrous metals 5/64" - 7/32" Carbide Strip	1	T118EHM1	TC	3-1/4	2-5/16	0.37	0.04	14
	3	T118EHM3	TC	3-1/4	2-5/16	0.37	0.04	14
Straight cuts, long life Stainless steel 3/64" - 5/64", steel and non-ferrous metals 1/16" - 1/8" Carbide Strip	1	T118AHM1	TC	3-1/4	2-5/16	0.37	0.04	24
	3	T118AHM3	TC	3-1/4	2-5/16	0.37	0.04	24

Application Special Cont'd.

special for Ceramics — Fiberglass, ceramics and glass

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
File effect for fine, straight or curved cuts Ceramics, glass, fiberglass 3/64" - 5/8" Carbide Grit — Coated	1	T130RF1†	TC	3-1/4	2-5/16	0.31	0.03	30 GRIT
	3	T130RF3†	TC	3-1/4	2-5/16	0.31	0.03	30 GRIT
File effect for fine, straight or curved cuts Ceramics, glass, fiberglass 3/64" - 3/8" Carbide Grit — Coated	1	T150RF1†	TC	3-1/4	2-5/16	0.31	0.03	50 GRIT
	3	T150RF3†	TC	3-1/4	2-5/16	0.31	0.03	50 GRIT

special for Fiber and Plaster — Cement board, fiberglass and plasterboard

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Fast, coarse cuts Cement board 1/4" - 2-3/8", fiberglass and plaster board 1/4" - 3/4" Carbide Tipped — Side set	1	T141HM1	TC	4	3	0.32	0.05	6
Fast, coarse cuts Cement board 1/4" - 3-1/8", fiberglass and plaster board 1/4" - 2-3/8" Carbide Tipped — Side set	1	T341HM1	TC	5-1/4	4-1/8	0.32	0.05	6

special for SolidSurface — Solid surface

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Fast, clean cuts Solid surface materials 3/16" - 2-1/2" Carbide Strip	1	T301CHM1	TC	4-5/8	3-1/2	0.41	0.05	8
	3	T301CHM3	TC	4-5/8	3-1/2	0.41	0.05	8

† Cool with water – use only with GFCI protected outlets or adapter.

Application **Wood**

PROGRESSOR for Wood — Fast and clean through thick and thin wood

Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight, fine, splinter free, accurate cuts in thick or thin material Hard / soft woods, laminated particleboard, OSB, plywood, particleboard Ground teeth & taper ground back							
3	**U234X3**	HCS	4-1/4	3-17/32	0.37	0.06	8-12 Progressive
5	**U234X**	HCS	4-1/4	3-17/32	0.37	0.06	8-12 Progressive

basic for Wood — Economical

Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Fast, coarse cuts, ideal for jig saws without orbital action Soft woods, OSB, plywood 3/16" - 2" Side set & milled							
5	**U111C**	HCS	3-5/8	3	0.30	0.05	8
For curved cuts Soft woods, OSB, plywood 5/64" - 3/4" Wavy set & milled							
5	**U19BO**	HCS	2-3/4	2	0.15	0.04	12

speed for Wood — Fast cuts

Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight & very fast cuts; plunge cuts Hard / soft woods, OSB, plywood 1/4" - 2-3/8" Side set & ground							
5	**U144D**	HCS	4	3-3/16	0.30	0.05	5-6 Progressive

clean for Wood — Fine, clean cuts

Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight, clean cuts Hard / soft woods, plywood, OSB, plastics 1/4" - 2-3/8" Use anti splinter guard for splinter free cuts Ground teeth & taper ground back							
3	**U101D3**	HCS	3-5/8	3	0.28	0.05	5-6 Progressive
5	**U101D**	HCS	3-5/8	3	0.28	0.05	5-6 Progressive
Straight, fine cuts Hard / soft woods, plastics, OSB, plywood, laminated particleboard 3/16" - 1-1/4" Ground teeth & taper ground back							
3	**U101B3**	HCS	3-5/8	3	0.28	0.05	10 Variable Gullet
5	**U101B**	HCS	3-5/8	3	0.28	0.05	10 Variable Gullet
Reverse tooth for splinter-free cuts on top of workpiece; straight, fine down cuts Laminated particleboard, OSB, plywood, hard / soft woods, plastics 3/16" - 1-1/4" Ground teeth & taper ground back							
3	**U101BR3**	HCS	3-5/8	3-3/16	0.28	0.05	10
5	**U101BR**	HCS	3-5/8	3-3/16	0.28	0.05	10

Application **Wood Cont'd.**

clean for Wood — Fine, clean cuts

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Curved cutting - pointed teeth for splinter free cuts on both sides of the workpiece Double sided laminates, laminated particleboard, MDF, hard / soft woods, plywood, plastics 5/64" - 3/4" Work without orbital action — Ground teeth & taper ground back	3	U101AO3	HCS	2-3/4	2	.017	0.05	20
	5	U101AO	HCS	2-3/4	2	017	0.05	20

clean for HardWood — Fine, clean cuts in hard wood, break resistant and durable

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight, clean cuts, long life Hard / soft woods, plywood, OSB, wood with nails, plastic 1/4" - 2-3/8" Ground teeth & taper ground back	5	U101DF	Bi-Metal	4	3-3/16	0.30	0.05	6
Straight cuts, long life Wood with nails, OSB, plastic 1/4" - 2-3/8" Side set & milled	5	U111DF	Bi-Metal	4	3-3/16	0.30	0.04	6
Straight, fine cuts, long life Hard / soft woods, plastics, plywood, laminated particleboard 3/16" - 1-1/4"	3	U101BF3	Bi-Metal	4	3-3/16	0.30	0.05	10 Variable Gullet
 Ground teeth & taper ground back	5	U101BF	Bi-Metal	4	3-3/16	0.30	0.05	10 Variable Gullet

special for Laminate — Precise, clean cuts

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight cuts Splinter-free cuts in laminate flooring Pointed teeth & ground	5	U1BIF	Bi-Metal	2-3/4	2	0.30	0.05	14
Curved cuts Splinter-free cuts in laminate flooring Work without orbital action — Pointed teeth & ground	5	U1AOF	Bi-Metal	2-3/4	2	0.19	0.05	20

speed for HardWood — Fast cuts in hard wood, break resistant and durable

	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight & very fast cuts Hard / soft woods, OSB, plywood, wood with nails 1/4" - 2-3/8" Side set & ground	5	U144DF	Bi-Metal	4	3-3/16	0.30	0.05	5-6 Progressive

Application **Metal***

PROGRESSOR for Metal — Fast cuts through thick and thin metals

Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Fast cuts & long life in thick or thin metal, pipes & metal profiles Sheet metal up to 8 gauge, metal 5/64" - 3/8", stainless steel 1/16" - 1/8", non-ferrous metal 5/64" - 3/4", plastics 1/16" - 1-1/4", fiberglass 3/64" - 3/4" Side set & milled	3	**U123X3**	HSS	3-5/8	3	0.33	0.04	10-24 Progressive
	5	**U123X**	HSS	3-5/8	3	0.33	0.04	10-24 Progressive

basic for Metal — Economical

Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight cuts Medium-thin metals 1/8" - 1/4" (ferrous and non-ferrous) Wavy set & milled	3	**U118B3**	HSS	3-1/8	2-1/2	0.30	0.04	11-14 Progressive
	5	**U118B**	HSS	3-1/8	2-1/2	0.30	0.04	11-14 Progressive
Straight cuts Medium-thin metals 5/64" - 7/32" (ferrous and non-ferrous) Wavy set & milled	3	**U118E3**	HSS	3-1/8	2-1/2	0.30	0.05	14-18 Progressive
	5	**U118E**	HSS	3-1/8	2-1/2	0.30	0.05	14-18 Progressive
Straight cuts Sheet metal 10-16 gauge, thin metals 1/16" - 1/8" (ferrous and non-ferrous) Wavy set & milled	3	**U118A3**	HSS	3-1/8	2-1/2	0.30	0.03	17-24 Progressive
	5	**U118A**	HSS	3-1/8	2-1/2	0.30	0.03	17-24 Progressive
Straight cuts Sheet metal 17-26 gauge, very thin metals 1/64" - 3/64" (ferrous and non-ferrous) Wavy set & milled	3	**U118G3**	HSS	2-3/4	2	0.30	0.03	36
	5	**U118G**	HSS	2-3/4	2	0.30	0.03	36

flexible for Metal — Break resistant and durable

Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight cuts & long life Medium-thin metals 1/8" - 1/4" (ferrous and non-ferrous) Wavy set & milled	5	**U118BF**	Bi-Metal	3-1/8	2-1/2	0.30	0.03	11-14 Progressive
Straight cuts & long life Medium-thin metals 5/64" - 7/32" (ferrous and non-ferrous) Wavy set & milled	5	**U118EF**	Bi-Metal	3-1/8	2-1/2	0.30	0.03	14-18 Progressive

* If cutting metal, use cutting oil, turpentine or a mixture of turpentine and petroleum oil to cool blade. NOTE: Use only with GFCI protected outlets or adapter.

Application **Metal* Cont'd.**

flexible for Metal — Break resistant and durable	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight cuts & long life Sheet metal 10-16 gauge, thin metals 1/16" - 1/8" (ferrous and non-ferrous) Wavy set & milled	3	U118AF3	Bi-Metal	3-1/8	2-1/2	0.30	0.03	17-24 Progressive
	5	U118AF	Bi-Metal	3-1/8	2-1/2	0.30	0.03	17-24 Progressive
Straight cuts & long life Sheet metal 17-26 gauge, very thin metals 1/64" - 3/64" (ferrous and non-ferrous) For material thickness under 3/64" use a thin piece of wood backing Wavy set & milled	5	U118GF	Bi-Metal	2-3/4	2	0.30	0.03	36

Application **All Purpose**

PROGRESSOR for All Purpose — Fast and clean cuts through wood with nails and other sandwich material	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Progressive tooth design for fast cuts & longer life in thick & thin materials Wood with nails, plywood, particleboard 3/16" - 3-5/8", metal 3/16" - 3/8", non-ferrous metal, aluminum 5/64" - 1-1/4" Side set & milled	3	U345XF3	Bi-Metal	5	4-7/32	0.39	0.05	5-10 Progressive
	5	U345XF	Bi-Metal	5	4-7/32	0.39	0.05	5-10 Progressive

accurate for Wood with Nails	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
Straight cuts Wood with nails, plastic 1/8" - 1-1/4", non-ferrous metal and aluminum 1/8" - 1/2", metal 1/8" - 1/4" Side set & milled	5	U111HF	Bi-Metal	4	3-3/16	0.30	0.04	10
Fast curve cuts Wood with nails, plastic 1/8" - 1-1/4", non-ferrous metal and aluminum 1/8" - 1/2" Side set & ground	5	U211HF	Bi-Metal	3-5/8	3	0.18	0.04	10

Application **Special**

special for Ceramics — Fiberglass, ceramics and glass	Package Quantity	Item #	Material	Overall Length (in.)	Working Length (in.)	Blade Height (in.)	Blade Thickness (in.)	Teeth Per Inch
File effect for fine straight or curved cuts Ceramics, glass, fiberglass 3/64" - 5/8" Carbide Grit — Coated	1	U30RF1†	TC	2-3/4	2	0.31	0.03	30 GRIT

† Cool with water – use only with GFCI protected outlets or adapter.

T-shank & U-shank Assortment Packs

T10CSC

T-Shank 10pc. Contractor Set w/Bonus Storage Pouch

U10CSC

- Also Available in U-Shank 10pc. Contractor Set w/ Bonus Storage Pouch

Item #	Package Qty.	Description	Overall Length (in.)	Teeth Per Inch (TPI)
T-shank 10 pc.				
T101B	2	Wood	4"	10
T144D	2	Wood	4"	5-6
T119BO	1	Wood	3-1/4"	12
T118A	1	Metal	3-5/8"	17-24
T118B	2	Metal	3-5/8"	11-14
T345XF	1	All-Purpose	5-1/4"	5-10
T234X	1	Wood	4-1/2"	8-12
U-shank 10 pc.				
U101B	2	Wood	3-5/8"	10
U144D	2	Wood	3-5/8"	5-6
U119BO	2	Wood	2-3/4"	12
U118A	1	Metal	3-1/8"	17-24
U118B	1	Metal	3-1/8"	11-14
U345XF	1	All-Purpose	5"	5-10
U234X	1	Wood	4-1/4"	8-12

TC21HC

T-Shank 21pc. Contractor Set w/ Bonus Storage Case

TW21HC

- Also Available in T-Shank 21pc. Woodworking Set w/ Bonus Storage Case

Item #	Package Qty.	Description	Overall Length (in.)	Teeth Per Inch (TPI)
T-shank 21 pc.				
T101B	5	Wood	4"	10
T144DP	5	Wood	4"	6
T345XF	2	All-Purpose	5-1/4"	5-10
T118A	5	Metal	3-5/8"	17-24
T123X	2	Metal	4"	10-24
T141HM1	2	Fiber/Plaster	4"	6
T-shank 21 pc. Woodworking				
T101B	4	Wood	4"	10
T144DP	4	Wood	4"	6
T101D	4	Wood	4"	5-6
T119BO	3	Wood	3-1/4"	12
T244D	3	Wood	4"	5-6
T101AO	3	Laminate	3-1/4"	20

T14CPSC

T-Shank 14pc Contractor Set w/ Bonus Storage Pouch

T18CHC

- Also Available in T-Shank 18pc. Contractor Set w/ Bonus Storage Case

Item #	Package Qty.	Description	Overall Length (in.)	Teeth Per Inch (TPI)
T-shank 14 pc.				
T119BO	2	Wood	3-1/4"	12
T144DP	1	Wood	4"	6
T101B	2	Wood	4"	10
T234X	3	Wood	4-1/2"	8-12
T123X	1	Metal	4"	10-24
T118B	2	Metal	3-5/8"	11-14
T118A	2	Metal	3-5/8"	17-24
T118G	1	Metal	3-5/8"	36
T-shank 18 pc.				
T119BO	2	Wood	3-1/4"	12
T144DP	3	Wood	4"	6
T101B	2	Wood	4"	10
T101BR	1	Wood	4"	10
T118B	3	Metal	3-5/8"	11-14
T118A	3	Metal	3-5/8"	17-24
T234X	2	Wood	4-1/2"	8-12
T345XF	1	All-Purpose	5-1/4"	5-10
T123X	1	Metal	4	10-24

U500A10

U-Shank 10pc. Assortment Set w/ Re-Usable Storage Case

T5002

- Also Available in T-Shank 10pc. Assortment Set w/ Re-Usable Storage Case

Item #	Package Qty.	Description	Overall Length (in.)	Teeth Per Inch (TPI)
U-shank 10 pc.				
U101B	2	Wood	3-5/8"	10
U144CD	2	Wood	3-5/8"	5-6
U19BO	2	Wood	2-3/4"	12
U118A	2	Metal	3-5/8"	17-24
U118B	2	Metal	3-5/8"	11-14
T-shank 10 pc.				
T101B	2	Wood	4"	10
T144D	2	Wood	4"	5-6
T119BO	2	Wood	3-1/4"	12
T118A	2	Metal	3-5/8"	17-24
T118B	2	Metal	3-5/8"	11-14

T-shank & U-shank Assortment Packs

T30C
T-Shank 30pc. Contractor Set

T30W
- Also Available in T-Shank 30pc. Woodworking Set

Item #	Package Qty.	Description	Overall Length (in.)	Teeth Per Inch (TPI)
T-shank 30 pc.				
T101B	10	Wood	4"	10
T101D	5	Wood	4"	5-6
T144D	5	Wood	4"	5-6
T118A	5	Metal	3-5/8"	17-24
T-shank 30 pc. Woodworking				
T101B	10	Wood	4"	10
T101D	10	Wood	4"	5-6
T144D	10	Wood	4"	5-6

T503
T-Shank 3pc. Laminate Flooring Set

U503
- Also Available in U-Shank 3pc. Laminate Flooring Set

Item #	Package Qty.	Description	Overall Length (in.)	Teeth Per Inch (TPI)
T-shank 3 pc.				
T101BIF	2	Laminate Flooring	3-1/4"	14
T101AOF	1	Laminate Flooring	3-1/4"	20
U-shank 3 pc.				
U1BIF	2	Laminate Flooring	2-3/4"	14
U1AOF	1	Laminate Flooring	2-3/4"	20

T500
T-Shank 5pc. Assortment Set

U502A5
- Also Available in U-Shank 5pc. Assortment Set

Item #	Package Qty.	Description	Overall Length (in.)	Teeth Per Inch (TPI)
T-shank 5 pc.				
T101B	1	Wood	4"	10
T144D	1	Wood	4"	5-6
T119BO	1	Wood	3-1/4"	12
T118A	1	Metal	3-5/8"	17-24
T118B	1	Metal	3-5/8"	11-14
U-shank 5 pc.				
U101B	1	Wood	3-5/8"	10
U144CD	1	Wood	3-5/8"	5-6
U101AO	1	Wood	2-3/4"	20
U118A	1	Metal	3-5/8"	17-24
U118B	1	Metal	3-5/8"	11-14

T567A3
T-Shank 3pc. Assortment Set

U567A3
- Also Available in U-Shank 3pc. Assortment Set

Item #	Package Qty.	Description	Overall Length (in.)	Teeth Per Inch (TPI)
T-shank 3 pc.				
T123X	1	Metal	4"	10-24
T234X	1	Wood	4-1/2"	8-12
T345XF	1	All Purpose	5-1/4"	5-10
U-shank 3 pc.				
U123X	1	Metal	3-5/8"	10-24
U234X	1	Wood	4-1/4"	8-12
U345XF	1	All Purpose	5"	5-10

BOSCH

Reciprocating Saw Blades

The Bosch line of reciprocating saw blades is one of the most expansive in the market today. The line is segmented into 3 categories of blades, designed for different levels of usage on the job site. All blades are color coded to their application for easy identification in the store and in the field. By incorporating key design features, materials and patented tooth technologies, Bosch optimizes blade cutting efficiency, bringing tradesmen fast cutting, long lasting blades.

Demolition Applications

- Thickest kerf
- Long life, less vibration

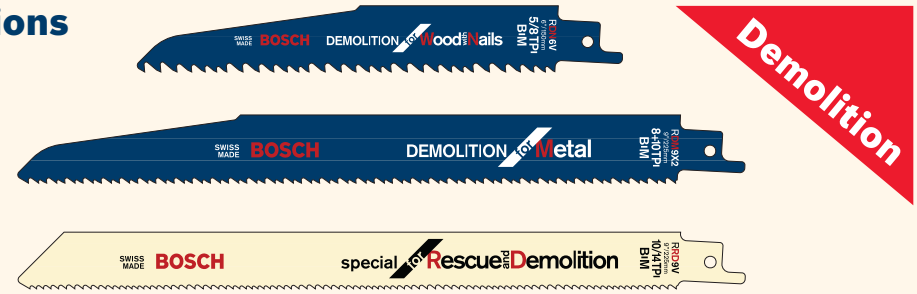

Frequent Heavy User

- Thick kerf
- Straight cuts

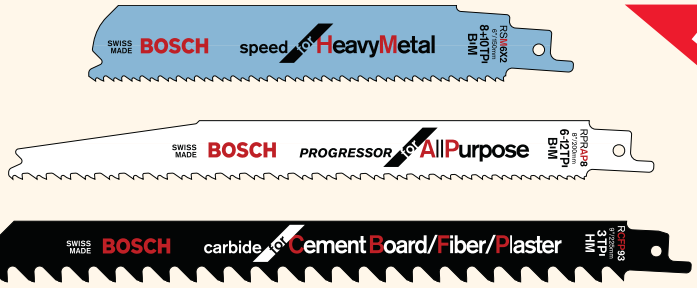

Standard Usage

- Thinner, flexible blades
- Faster cutting
- Includes NEW! 4" metal cutting blades

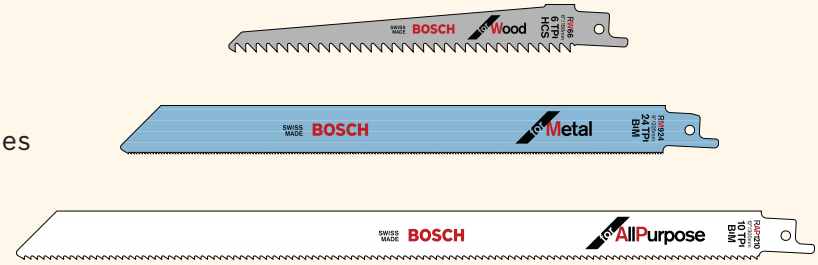

TECHNICAL BLADE ANATOMY

- **TPI: Teeth per inch:**
  The lower the TPI, the faster the blade will cut. The higher the TPI, the cleaner the blade will cut.
- **Tilt angle:**
  The tilt angle is the angle at which the blade cuts into the material. A higher tilt degree produces a faster, more aggressive cut. Tilt angle is optimized based on application for best life to speed ratio.
- **Gullet:**
  The space between each tooth that collects and clears out the material being cut. The deeper the gullet, the more efficiently the chips are cleared.
- **Blade shapes:**
  Taper blade bodies are designed for plunge cutting, curve cuts and easier starts in tough to reach applications. Non-taper bodies offer more stability and straighter cuts.
- **Settings:**
  Blade tooth settings vary from one blade to another to optimize cutting efficiency by material applications.
- **Body thickness:**
  Thinner blades offer faster cutting and flexibility for flush cutting. Thick kerfs offer straighter and more stable cutting.
- **Reinforced tooth:**
  A wide tooth base with a smaller gullet results in a stronger tooth design.

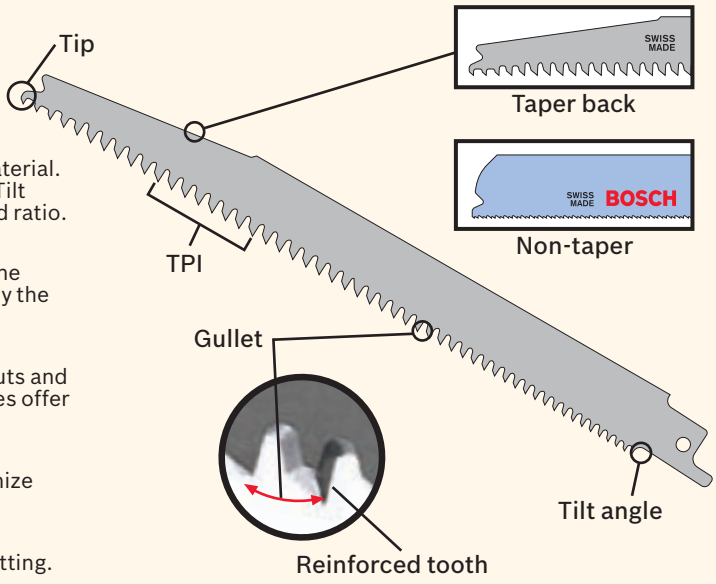

Clean for Heavy Metal

2x2 Tooth Design
- **Two alternating tooth pitch:**
  Increases cutting speed in metal up to 20%
- **Reinforced teeth:**
  Up to 50% longer life against leading 18TPI competitor blades.

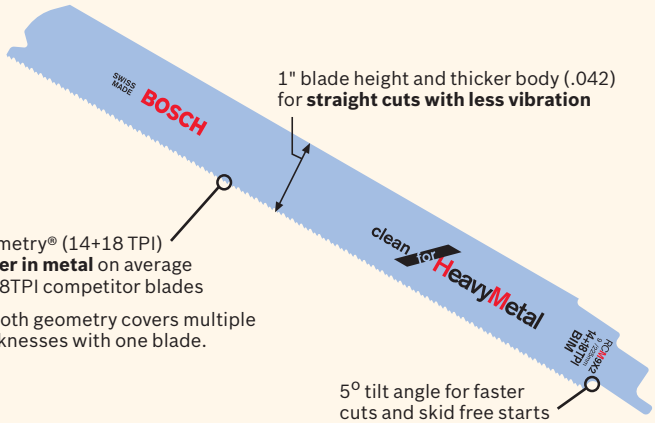

1" blade height and thicker body (.042) for **straight cuts with less vibration**

2x2 tooth geometry® (14+18 TPI) **cuts 20% faster in metal** on average than leading 18TPI competitor blades

- 14+18 2x2 tooth geometry covers multiple material thicknesses with one blade.

5° tilt angle for faster cuts and skid free starts

Speed for Heavy Metal


2x2 Tooth Geometry
Bigger pitch, bigger gullet
followed by a reinforced tooth to clear material (speed of cut)
Standard tooth
Reinforced tooth
Smaller pitch, smaller gullet
followed by an aggressive tooth to clear material (speed of cut)

2x2 Tooth Design:
Two alternating tooth pitch:
- Increases cutting speed in metal up to 20%

Combo teeth/reinforced teeth followed by aggressive tooth:
- Increase life by 2X in metal
- Combine speed and durability

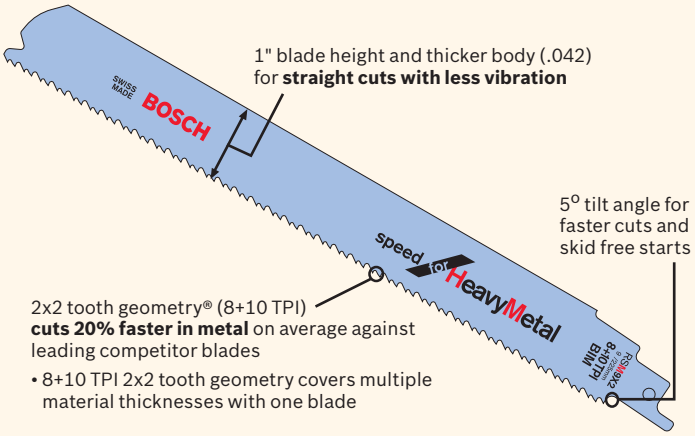

1" blade height and thicker body (.042) for **straight cuts with less vibration**

5° tilt angle for faster cuts and skid free starts

2x2 tooth geometry® (8+10 TPI) **cuts 20% faster in metal** on average against leading competitor blades

- 8+10 TPI 2x2 tooth geometry covers multiple material thicknesses with one blade

Demolition for Wood with Nails

Also Available
- Demolition blades for metal

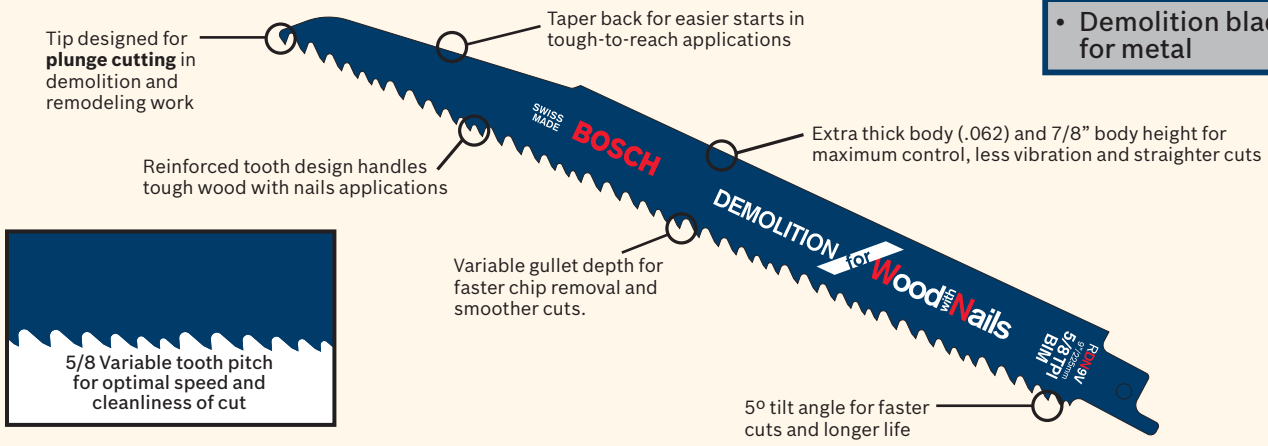
Tip designed for **plunge cutting** in demolition and remodeling work
Taper back for easier starts in tough-to-reach applications
Reinforced tooth design handles tough wood with nails applications
Extra thick body (.062) and 7/8" body height for maximum control, less vibration and straighter cuts
Variable gullet depth for faster chip removal and smoother cuts.
5º tilt angle for faster cuts and longer life
5/8 Variable tooth pitch for optimal speed and cleanliness of cut
SWISS MADE
BOSCH
DEMOLITION for Wood with Nails
RDW9V
9"/230mm
5/8 TPI
BiM

Standard Use for Metal

Tooth Geometry



Pair-setting optimized for fast cuts and long life in metal

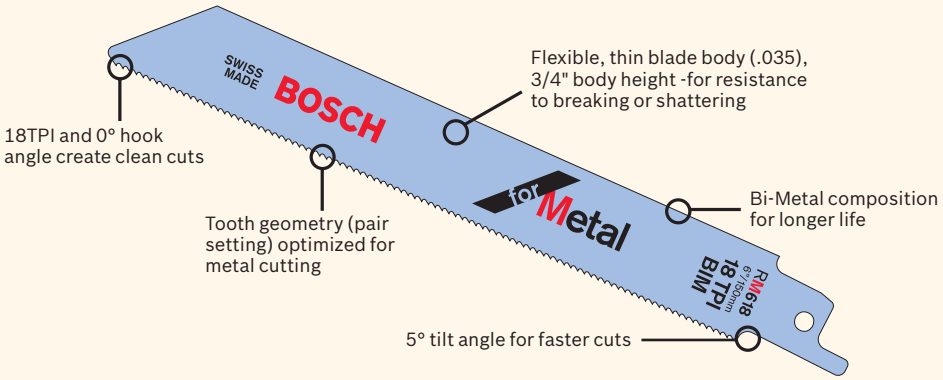
18TPI and 0º hook angle create clean cuts
Flexible, thin blade body (.035), 3/4" body height -for resistance to breaking or shattering
Tooth geometry (pair setting) optimized for metal cutting
Bi-Metal composition for longer life
5º tilt angle for faster cuts
SWISS MADE
BOSCH
for Metal
RM618
6"/150mm
18 TPI
BiM

Progressor® Patented Tooth Design

The Progressor® name comes from the progressive tooth pattern that graduates from high to low teeth per inch over the length of the blade. The progressive tooth pattern is engineered so the blade can cut both thick and thin material cleanly and smoothly. Progressor® blades are ideal for switching from one material thickness to another, eliminating the need for blade changes and saving time on the job. Available for wood, metal or all-purpose use.

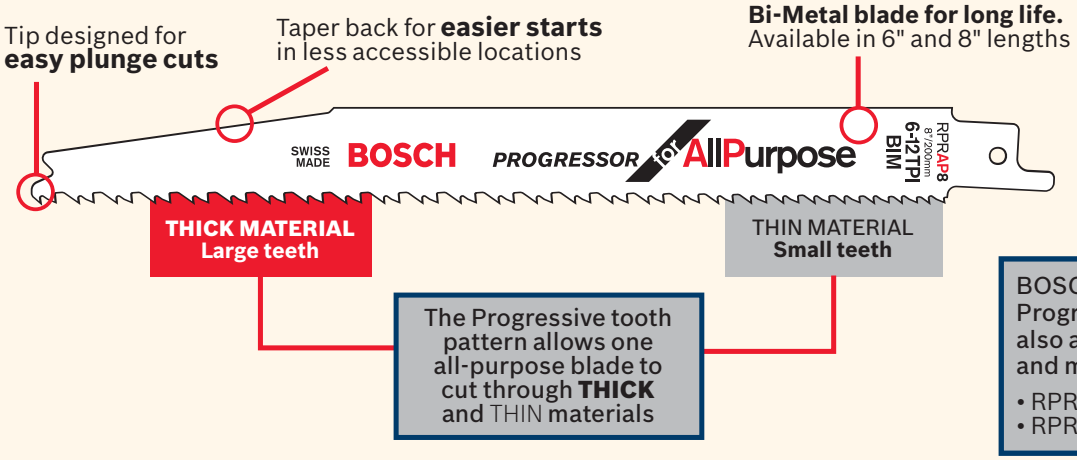
Tip designed for **easy plunge cuts**
Taper back for **easier starts** in less accessible locations
Bi-Metal blade for long life. Available in 6" and 8" lengths
SWISS MADE
BOSCH
PROGRESSOR for AllPurpose
RPRAP8
8"/200mm
6-12TPI
BiM
THICK MATERIAL Large teeth
THIN MATERIAL Small teeth
The Progressive tooth pattern allows one all-purpose blade to cut through **THICK** and THIN materials

BOSCH Patented Progressor® Blades also available for wood and metal cutting:
- RPRW8 For Wood
- RPRM6 For Metal

Demolition Reciprocating Saw Blade Line

DEMOLITION for Wood and Nails Wood/Metal

Demolition for Wood with Nails

Variable 5/8 tooth pitch ideal for heavy demolition work in wood with nails, but strong enough to handle thick metals and other materials

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RDN6V	5/8	.062	6	Bi-Metal	5
RDN6V-25P	5/8	.062	6	Bi-Metal	25
RDN6V-25B	5/8	.062	6	Bi-Metal	25 (bulk)
RDN9V	5/8	.062	9	Bi-Metal	5
RDN9V-25P	5/8	.062	9	Bi-Metal	25
RDN9V-25B	5/8	.062	9	Bi-Metal	25 (bulk)
RDN12V	5/8	.062	12	Bi-Metal	5
RDN12V-25P	5/8	.062	12	Bi-Metal	25
RDN12V-25B	5/8	.062	12	Bi-Metal	25 (bulk)

DEMOLITION for Metal Metal

Demolition for Metal

Patented 2x2 tooth pitch (8+12 TPI) ideal for fast cutting in metals

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RDM6X2	8+10	.062	6	Bi-Metal	5
RDM6X2-25P	8+10	.062	6	Bi-Metal	25
RDM6X2-25B	8+10	.062	6	Bi-Metal	25 (bulk)
RDM9X2	8+10	.062	9	Bi-Metal	5
RDM9X2-25P	8+10	.062	9	Bi-Metal	25
RDM9X2-25B	8+10	.062	9	Bi-Metal	25 (bulk)

DEMOLITION for Demolition Demolition

for Demolition

Tooth pitch designed for all purpose applications such as sandwich materials, metals, plastics and wood with nails

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RD6V	10/14	.05	6	Bi-Metal	5
RD6V-25P	10/14	.05	6	Bi-Metal	25
RD6V-25B	10/14	.05	6	Bi-Metal	25 (bulk)
RD9V	10/14	.05	9	Bi-Metal	5
RD9V-25P	10/14	.05	9	Bi-Metal	25
RD9V-25B	10/14	.05	9	Bi-Metal	25 (bulk)
RD12V	10/14	.05	12	Bi-Metal	5
RD12V-25P	10/14	.05	12	Bi-Metal	25
RD12V-25B	10/14	.05	12	Bi-Metal	25 (bulk)

special for Rescue and Demolition Specialty

Special for Rescue and Demolition-

Patented glow-in-the-dark coating for high visibility in extreme conditions

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RRD6V	10/14	.05	6	Bi-Metal	5
RRD6V-25P	10/14	.05	6	Bi-Metal	25
RRD9V	10/14	.05	9	Bi-Metal	5
RRD9V-25P	10/14	.05	9	Bi-Metal	25
RRD12V	10/14	.05	12	Bi-Metal	5
RRD12V-25P	10/14	.05	12	Bi-Metal	25

Heavy Use Reciprocating Saw Blade Line

PROGRESSOR for Wood — Wood

PROGRESSOR® for Wood
Progressive tooth pitch for cutting various thicknesses of wood and wood materials

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RPRW8	6-10	.050	8	HCS	5
RPRW8-25P	6-10	.050	8	HCS	25
RPRW8-25B	6-10	.050	8	HCS	25 (bulk)

speed for Heavy Metal — Metal

Speed for Heavy Metal
Patented 2x2 tooth pitch (8+10 TPI) ideal for fast cuts in metal

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RSM6X2	8+10	.042	6	Bi-Metal	5
RSM6X2-25P	8+10	.042	6	Bi-Metal	25
RSM6X2-25B	8+10	.042	6	Bi-Metal	25 (bulk)
RSM9X2	8+10	.042	9	Bi-Metal	5
RSM9X2-25P	8+10	.042	9	Bi-Metal	25
RSM9X2-25B	8+10	.042	9	Bi-Metal	25 (bulk)
RSM12X2	8+10	.042	12	Bi-Metal	5
RSM12X2-25P	8+10	.042	12	Bi-Metal	25
RSM12X2-25B	8+10	.042	12	Bi-Metal	25 (bulk)

straight for Heavy Metal — Metal

Straight for Heavy Metal
7" blade length ideal for most pipe diameters

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RSM7X2	8+10	.050	7	Bi-Metal	5
RSM7X2-25P	8+10	.050	7	Bi-Metal	25
RSM7X2-25B	8+10	.050	7	Bi-Metal	25 (bulk)

PROGRESSOR for Metal — Metal

PROGRESSOR® for Metal
Progressive tooth pitch for cutting various thicknesses of ferrous and non-ferrous metals

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RPRM6	8-14	.050	6	Bi-Metal	5
RPRM6-25P	8-14	.050	6	Bi-Metal	25
RPRM6-25B	8-14	.050	6	Bi-Metal	25 (bulk)

flush for Heavy Metal — Metal

Flush for Heavy Metal
Flexible blade and 10" length ideal for flush cutting applications and pallet repair work

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RFM10V	9/12	.035	10	Bi-Metal	5
RFM10V-25P	9/12	.035	10	Bi-Metal	25
RFM10V-25B	9/12	.035	10	Bi-Metal	25 (bulk)

Heavy Use Reciprocating Saw Blade Line Cont'd.

clean for Heavy Metal — Metal

Clean for Heavy Metal
Patented 2x2 tooth geometry (14+18 TPI) ideal for clean cutting in thick metals and provides longer blade life

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RCM6X2	14+18	.042	6	Bi-Metal	5
RCM6X2-25P	14+18	.042	6	Bi-Metal	25
RCM6X2-25B	14+18	.042	6	Bi-Metal	25 (bulk)
RCM9X2	14+18	.042	9	Bi-Metal	5
RCM9X2-25P	14+18	.042	9	Bi-Metal	25
RCM9X2-25B	14+18	.042	9	Bi-Metal	25 (bulk)
RCM12X2	14+18	.042	12	Bi-Metal	5
RCM12X2-25P	14+18	.042	12	Bi-Metal	25
RCM12X2-25B	14+18	.042	12	Bi-Metal	25 (bulk)

scroll for Metal — Metal

Scroll for Metal
Blade body designed for scroll work



Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RSM418	18	.035	4	Bi-Metal	5

speed for Wood with Nails — ALL-PURPOSE

Speed for Wood with Nails
Variable tooth pitch increases speed over standard 6 TPI blades. Tapered nose allows for curved cutting

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RSN6V	5/8	.050	6	Bi-Metal	5
RSN6V-25P	5/8	.050	6	Bi-Metal	25
RSN6V-25B	5/8	.050	6	Bi-Metal	25 (bulk)
RSN9V	5/8	.050	9	Bi-Metal	5
RSN9V-25P	5/8	.050	9	Bi-Metal	25
RSN9V-25B	5/8	.050	9	Bi-Metal	25 (bulk)

heavy for Wood with Nails — ALL-PURPOSE

HEAVY for Wood with Nails
Taller body improves accuracy and decreases vibration. Taper nose allows for plunge cutting

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RHN66	6	.053	6	Bi-Metal	5
RHN66-25P	6	.053	6	Bi-Metal	25
RHN66-25B	6	.053	6	Bi-Metal	25 (bulk)
RHN96	6	.053	9	Bi-Metal	5
RHN96-25P	6	.053	9	Bi-Metal	25
RHN96-25B	6	.053	9	Bi-Metal	25 (bulk)
RHN126	6	.053	12	Bi-Metal	5
RHN126-25P	6	.053	12	Bi-Metal	25
RHN126-25B	6	.053	12	Bi-Metal	25 (bulk)

Heavy Use Reciprocating Saw Blade Line Cont'd.

PROGRESSOR for AllPurpose ALL-PURPOSE

PROGRESSOR® for All Purpose
Progressive tooth pitch for cutting various material thicknesses in wood, plastic and metal



Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RPRAP6	6-12	.050	6	Bi-Metal	5
RPRAP6-25P	6-12	.050	6	Bi-Metal	25
RPRAP6-25B	6-12	.050	6	Bi-Metal	25 (bulk)
RPRAP8	6-12	.050	8	Bi-Metal	5
RPRAP8-25P	6-12	.050	8	Bi-Metal	25
RPRAP8-25B	6-12	.050	8	Bi-Metal	25 (bulk)

clean for Thin Materials ALL-PURPOSE

Clean for Thin Materials
Patented 2x2 tooth pitch (14+18) and special tooth geometry ideal for clean cuts in thin materials



Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RCTM6X2	14+18	.042	6	Bi-Metal	5
RCTM6X2-25P	14+18	.042	6	Bi-Metal	25
RCTM6X2-25B	14+18	.042	6	Bi-Metal	25 (bulk)

carbide for Cement Board/Fiber/Plaster Specialty

Carbide for Cement Board/Fiber/Plaster
Individually braised carbide teeth for abrasive applications like cement board, fiberglass and plasterboard

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RCFP66-2	6	.039	6	Carbide	2
RCFP93-2	3	.039	9	Carbide	2
RCFP123-2	3	.050	12	Carbide	2

clean for Drywall Specialty

Clean for Drywall
0° tooth pitch minimizes drywall tearing

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RDW66	6	.050	6	Bi-Metal	5

carbide for Stainless Steel Specialty

Carbide for Stainless Steel
Full strip of carbide teeth braised to body optimizes cutting performance in stainless steel

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RS418-2	18	.059	4	Carbide	2
RS618-2	18	.050	6	Carbide	2

carbide for Cast Iron+Block Specialty

Carbide for Cast Iron+Block
Carbide grit cutting edge for cutting cinder block, brick, cast iron, pipe and other abrasive materials

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RCB6G-2	30 Grit	.032	6	Carbide	2
RCB9G-2	30 Grit	.050	9	Carbide	2

Standard Reciprocating Saw Blade Line

Wood — Wood

For Wood

Fleam ground super sharp cutting teeth offer fastest cutting blade for wood materials. Not recommended for wood with nails

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RW66	6	.050	6	HCS	5
RW66-25B	6	.050	6	HCS	25 (bulk)
RW96	6	.050	9	HCS	5
RW96-25B	6	.050	9	HCS	25 (bulk)
RW126	6	.050	12	HCS	5
RW126-25B	6	.050	12	HCS	25 (bulk)

Pruning — Wood

For Pruning

Hardened fleam ground teeth ideal for green, wet woods, pressure treated lumber, and all other wood applications. Not recommended for wood with nails

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RP95	5	.059	9	HCS	5
RP95-25B	5	.059	9	HCS	25 (bulk)
RP125	5	.059	12	HCS	5
RP125-25B	5	.059	12	HCS	25 (bulk)

Metal — Metal

For Metal

Ideal for ferrous and non-ferrous metals

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RM414	14	.035	4	Bi-Metal	5
RM614	14	.035	6	Bi-Metal	5
RM614-25B	14	.035	6	Bi-Metal	25 (bulk)
RM914	14	.035	9	Bi-Metal	5
RM914-25B	14	.035	9	Bi-Metal	25 (bulk)
RM418	18	.035	4	Bi-Metal	5
RM618	18	.035	6	Bi-Metal	5
RM618-25B	18	.035	6	Bi-Metal	25 (bulk)
RM918	18	.035	9	Bi-Metal	5
RM918-25B	18	.035	9	Bi-Metal	25 (bulk)
RM1218	18	.035	12	Bi-Metal	5
RM1218-25B	18	.035	12	Bi-Metal	25 (bulk)
RM424	24	.035	4	Bi-Metal	5
RM624	24	.035	6	Bi-Metal	5
RM624-25B	24	.035	6	Bi-Metal	25 (bulk)
RM924	24	.035	9	Bi-Metal	5
RM924-25B	24	.035	9	Bi-Metal	25 (bulk)

Standard Reciprocating Saw Blade Line Cont'd.

for Wood with Nails ALL-PURPOSE

For Wood with Nails
Thinner blade allows for faster cutting in wood with nails

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RN66	6	.035	6	Bi-Metal	5
RN66-25B	6	.035	6	Bi-Metal	25 (bulk)
RN96	6	.035	9	Bi-Metal	5
RN96-25B	6	.035	9	Bi-Metal	25 (bulk)
RN126	6	.035	12	Bi-Metal	5
RN126-25B	6	.035	12	Bi-Metal	25 (bulk)

for All Purpose ALL-PURPOSE

For ALL-PURPOSE
Thinner blade allows for faster cutting in wood, plastic, metal and sandwich materials

Item #	TPI	Kerf	Length (in.)	Composite Material	Pack Quantity
RAP610	10	.035	6	Bi-Metal	5
RAP610-25B	10	.035	6	Bi-Metal	25 (bulk)
RAP810	10	.035	8	Bi-Metal	5
RAP810-25B	10	.035	8	Bi-Metal	25 (bulk)
RAP910	10	.035	9	Bi-Metal	5
RAP910-25B	10	.035	9	Bi-Metal	25 (bulk)
RAP1210	10	.050	12	Bi-Metal	5
RAP1210-25B	10	.050	12	Bi-Metal	25 (bulk)
RAP6V	10/14	.035	6	Bi-Metal	5
RAP6V-25B	10/14	.035	6	Bi-Metal	25 (bulk)
RAP9V	10/14	.035	9	Bi-Metal	5
RAP9V-25B	10/14	.035	9	Bi-Metal	25 (bulk)
RAP12V	10/14	.035	12	Bi-Metal	5
RAP12V-25B	10/14	.035	12	Bi-Metal	25 (bulk)

R68HC

8pc. Contractor Set

Includes:

RHN66 (2)	(Heavy-Duty Wood/Nails)
RCTM6X2 (2)	(Thin Materials)
RAP6V (2)	(All-Purpose)
RPRAP6 (2)	(All-Purpose)

BONUS Hard Storage Case

RC5SC

5pc. Contractor Set

Includes:

RHN66 (1)	(Heavy-Duty Wood/Nails)
RHN96 (1)	(Heavy-Duty Wood/Nails)
RM618 (1)	(Metal Cutting)
RPRAP6 (1)	(All-Purpose)
RW66 (1)	(Wood)

BONUS Storage Pouch & (3) T234X Progressor® Jigsaw Blades

RAP10PK

10pc. All-Purpose Set

Includes:

RM614 (2)	(Metal Cutting)
RM618 (2)	(Metal Cutting)
RN66 (2)	(Wood with Nails)
RN96 (1)	(Wood with Nails)
RW66 (3)	(Wood)

BONUS Storage Pouch

RD6SC

6pc. Demolition Set

Includes:

RHN66 (1)	(Heavy-Duty Wood/Nails)
RHN96 (1)	(Heavy-Duty Wood/Nails)
RHN126 (1)	(Heavy-Duty Wood/Nails)
RSM7X2 (1)	(Heavy Metal)
RPRAP6 (1)	(All-Purpose)
RCFP66 (1)	(Cement/Plaster Board)

BONUS Storage Pouch

RD12PK

12pc. Demolition Set

Includes:

RDM6X2 (2)	(Demo for Metal)
RDM9X2 (1)	(Demo for Metal)
RDN6V (2)	(Demo Wood w/ Nails)
RDN9V (2)	(Demo Wood w/ Nails)
RD6V (3)	(Demolition)
RSW93 (2)	(Wood)

BONUS Storage Pouch

RE6SC

6pc. Electrician Set

Includes:

RHN66 (1)	(Heavy-Duty Wood/Nails)
RHN96 (1)	(Heavy-Duty Wood/Nails)
RCTM6X2 (1)	(Thin Materials)
RDW66 (1)	(Drywall)
RM914 (1)	(Metal Cutting)
RM918 (1)	(Metal Cutting)

BONUS Storage Pouch & Spade Bits (3/4", 1", 1-1/4")

S10PKDP

10pc. Heavy-Duty Set

Includes:

RCTM6X2 (2)	(Thin Materials)
RHN66 (2)	(Heavy-Duty Wood/Nails)
RSM7X2 (2)	(Heavy Metal)
RHN96 (2)	(Heavy-Duty Wood/Nails)
RFM10V (2)	(Heavy Metal)

BONUS Storage Pouch

RP6SC

6pc. Plumber Set

Includes:

RHN96 (1)	(Heavy-Duty Wood/Nails)
RSM7X2 (1)	(Heavy Metal)
RFM10V (1)	(Heavy Metal)
RCTM6X2 (1)	(Thin Materials)
RPRAP8 (1)	(All-Purpose)
RCB9G (1)	(Cast Iron & Block)

BONUS Storage Pouch & Spade Bits (3/4", 1", 1-1/4")

Bosch now offers a complete line of woodworking and specialty saw blades for the professional user. The expanded product line features blades from 7-1/4" up to 18" in diameter and offers tooth grind configurations for a wide range of applications.

Advantages of Bosch Blades

Tensioned bodies
- Assure superior blade flatness
- Resist side load to maintain accuracy

Anti friction coating
- Reduces heat - resists gum and pitch build up
- Protects blade against rust and corrosion

Fully hardened, laser cut plate
- Accurate and true running

Laser cut expansion slots
- Allow blade to expand & contract without warping

Exclusive patented Dyanite® micrograin carbide teeth
- Stay sharp up to 6X longer than standard carbide
- Extra large teeth allow resharpening for extended life

Tri-Metal shim braze
- Increases impact resistance for longer life
- Helps prevent microfractures in the braze joint

Blade Anatomy

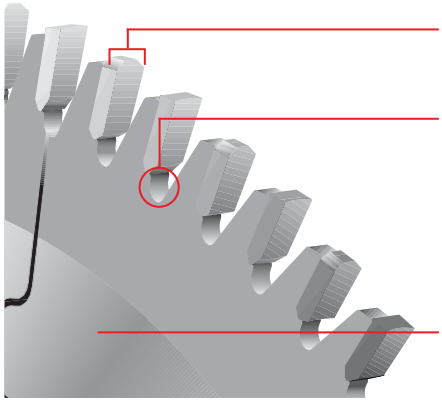

Kerf: Width of cut (also largest width of saw tooth)

Gullet: Cutaway area between teeth for efficient chip removal

Hook angle: Angle of tooth relative to blade radius, which determines aggressiveness of cut and workpiece finish

Plate: Body of the blade, which supports and guides the teeth



Grind Configuration: Shape and pattern of teeth, which determines application and performance

	Grind Type	Primary Application
	Flat Top Grind (FTG)	Ripping, grooving and joints
	Alternate Top Bevel (ATB)	Crosscutting, cutoff and trim of wood & plywood
	Triple Chip Grind (TCG)	Hard wood, non-ferrous metals, plastics
	Multi-Purpose Carbide Tip (MCT)	Combination tooth grind. Ripping and crosscutting of wood and composites
	Tri-Grind (TRI)	Combined ATB and FTG – Fast, clean rip and crosscuts
	Solid Surface Grind (SSG)	Optimized for clean cuts and long life in dense synthetic materials

Bosch Value-Added Features

Noise/Vibration Reduced Blades

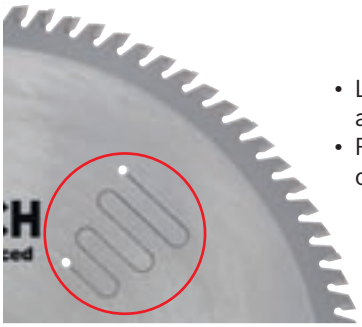

- Laser cut body slots reduce noise and vibration
- For precise results in furniture, cabinetry and custom woodworking

Average sound pressure levels in cross cut operation is reduced by over 60% when compared to non-noise reduced blades

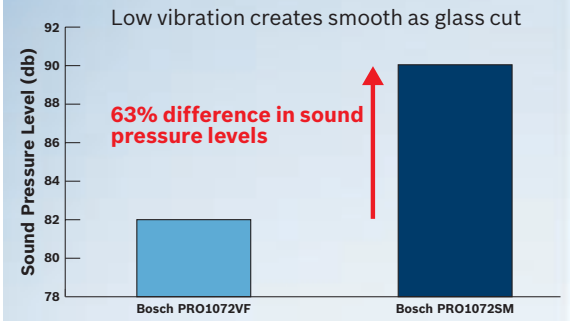

Slide Miter/Radial Tension Ring Blades

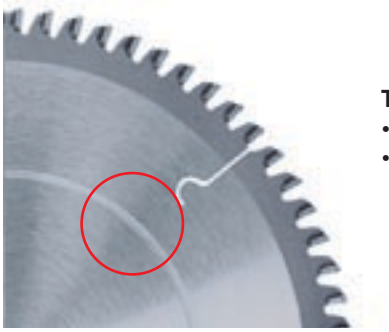

Tension rings:
- Add strength, stiffness and stability to body
- Give blade the capability to withstand heat and side loads without warping or deflection

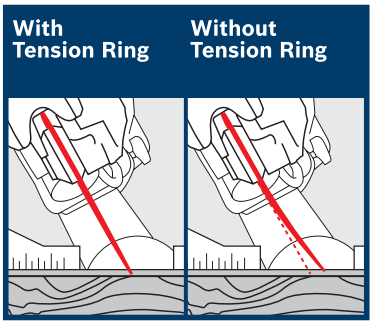

Dado Sets

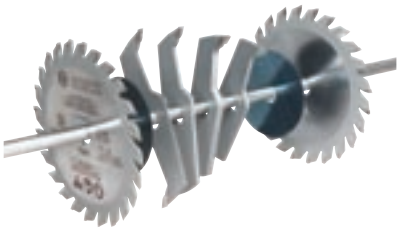

- All components are precision matched, roll- and hammer-tensioned by hand to run true
- Bodies are laser cut from nickel-alloy tool steel, ground and hardened to Rockwell 42-44C for durability and cutting accuracy
- Extra-large teeth with tri-metal shim brazing, CNC sharpened with diamond wheels for razor-sharp edges
- Arbor holes are honed to H7 tolerance (.0007") for precise concentricity to minimize wobble
- Produce exceptionally smooth grooves and slots in wood, veneered plywood, and composites

Steel Cutting Blades

- Designed for steel plate, angle iron, bar stock, or pipe
- Extra hard C6 carbide teeth with 0˚ hook angle produce a fast, clean cut with minimal burrs
- Cooler running, longer life, with less dust and debris than bonded abrasive wheels

Saw Blade Product Offering

Woodworking Blades

General Purpose



- Designed to produce clean cuts in a variety of operations
- Ideal for ripping or crosscutting when using a single blade
- For use on soft and hard woods and wood products

Item #	Diameter	Teeth	Arbor size	Grind Type	Hook Angle	Plate Thickness	Kerf	Tools
PRO840GP‡	8"	40	5/8"	ATB	12˚	.086"	.120"	Circular/Table/Miter/Radial Arm
PRO1040GP**	10"	40	5/8"	ATB	15˚	.086"	.128"	Table/Miter/Radial Arm
PRO1260GP**	12"	60	1"	ATB	12˚	.103"	.145"	Table/Miter/Radial Arm
PRO1480GP†	14"	80	1"	ATB	10˚	.110"	.152"	Stationary
PRO1680GP†	16"	80	1"	ATB	10˚	.130"	.172"	Stationary
PRO1880GP†	18"	80	1"	ATB	10˚	.130"	.184"	Stationary

**Also available in bulk box rather than fabric pouch. For bulk blade add a "B" to the catalog # (example. PRO1040GPB).

Combination

- Classic tooth and gullet design for clean ripping and crosscutting in wood
- Work well on composites and man-made panels
- Optimized for multi-purpose hand-feed table saw applications

Item #	Diameter	Teeth	Arbor size	Grind Type	Hook Angle	Plate Thickness	Kerf	Tools
PRO840COMB**	8"	40	5/8"	MCT	15˚	.086"	.118"	Table
PRO940COMB**	9"	40	5/8"	MCT	15˚	.086"	.127"	Table
PRO1050COMB**	10"	50	5/8"	MCT	15˚	.086"	.128"	Table
PRO1260COMB**	12"	60	1"	MCT	15˚	.103"	.145"	Table
PRO1470COMB†	14"	70	1"	MCT	15˚	.110"	.152"	Table

**Also available in bulk box rather than fabric pouch. For bulk blade add a "B" to the catalog # (example. PRO840COMBB).

Ripping

- Designed for fast ripping in soft and hard woods
- Rigid bodies keep blade true in long workpieces and demanding cuts

Item #	Diameter	Teeth	Arbor size	Grind Type	Hook Angle	Plate Thickness	Kerf	Tools
PRO824RIP**	8"	24	5/8"D*	ATB	20˚	.086"	.120"	Circular/Table
PRO1024RIP**	10"	24	5/8"	FTG	20˚	.086"	.128"	Table
PRO1236RIP**	12"	36	1"	FTG	20˚	.103"	.145"	Table
PRO1436RIP†	14"	36	1"	FTG	20˚	.110"	.156"	Stationary
PRO1648RIP†	16"	48	1"	ATB	15˚	.130"	.176"	Stationary
PRO1860RIP†	18"	60	1"	ATB	10˚	.130"	.184"	Stationary

**Also available in bulk box rather than fabric pouch. For bulk blade add a "B" to the catalog # (example. PRO824RIPB).

Noise/Vibration Reduced

- Feature computer-designed laser cut slots in body to reduce noise and vibration up to 60%
- Exceptionally fine finish that virtually eliminates sanding and fitting of parts

Item #	Diameter	Teeth	Arbor size	Grind Type	Hook Angle	Plate Thickness	Kerf	Tools
PRO1072VF**	10"	72	5/8"	TRI	10˚	.086"	.128"	Miter/Table/Radial Arm
PRO1296VF**	12"	96	1"	TRI	10˚	.103"	.145"	Miter/Table/Radial Arm

**Also available in bulk box rather than fabric pouch. For bulk blade add a "B" to the catalog # (example. PRO1296VFB).

*5/8" D = diamond knockout
†Comes in bulk box
‡Comes in folder

Woodworking Blades (Continued)

Plywood and Finishing

- Minimize chipping and tearout when cutting plywood
- Higher tooth count produces excellent results on laminated or veneered panels
- Produce clean crosscuts in hard and soft wood

Item #	Diameter	Teeth	Arbor size	Grind Type	Hook Angle	Plate Thickness	Kerf	Tools
PRO860FIN‡	8"	60	5/8"	ATB	12˚	.086"	.132"	Circular/Table/Miter/Radial Arm
PRO960FIN**	9"	60	5/8"	ATB	12˚	.086"	.120"	Table/Miter/Radial Arm
PRO1060FIN**	10"	60	5/8"	ATB	12˚	.086"	.120"	Table/Miter/Radial Arm
PRO1080FIN**	10"	80	5/8"	ATB	12˚	.086"	.120"	Table/Miter/Radial Arm
PRO1280FIN**	12"	80	1"	ATB	12˚	.103"	.145"	Table/Miter/Radial Arm
PRO14100FIN†	14"	100	1"	ATB	10˚	.110"	.152"	Stationary
PRO16100FIN†	16"	100	1"	ATB	10˚	.130"	.174"	Stationary
PRO18100FIN†	18"	100	1"	ATB	10˚	.130"	.184"	Stationary

**Also available in bulk box rather than fabric pouch. For bulk blade add a "B" to the catalog # (example. PRO960FINB).

Miter

- Optimized for straight or compound angles where precise cuts are critical
- Tensioned plates maintain flatness and stability for the life of the blade

Item #	Diameter	Teeth	Arbor size	Grind Type	Hook Angle	Plate Thickness	Kerf	Tools
PRO8548SM**	8-1/2"	48	5/8"	TRI	0˚	.070"	.108"	Miter/Table/Radial Arm
PRO1072SM**	10"	72	5/8"	TRI	0˚	.086"	.118"	Miter/Table/Radial Arm
PRO1296SM**	12"	96	1"	TRI	0˚	.103"	.134"	Miter/Table/Radial Arm

**Also available in bulk box rather than fabric pouch. For bulk blade add a "B" to the catalog # (example. PRO1296SMB).

Chipboard/OSB

- Fast sizing of chipboard/OSB sheets and stacked sheets
- Cut laminates, plastics, PVC, acrylics, polyurethane and similar synthetics



Item #	Diameter	Teeth	Arbor size	Grind Type	Hook Angle	Plate Thickness	Kerf	Tools
PRO860CHB‡	8"	60	5/8"	TCG	10˚	.086"	.120"	Circular/Table/Miter/Radial Arm
PRO1040CHB**	10"	40	5/8"	TCG	10˚	.086"	.120"	Table/Miter/Radial Arm
PRO1060CHB**	10"	60	5/8"	TCG	10˚	.086"	.120"	Table/Miter/Radial Arm
PRO1080CHB**	10"	80	5/8"	TCG	10˚	.086"	.120"	Table/Miter/Radial Arm
PRO1248CHB**	12"	48	1"	TCG	10˚	.103"	.120"	Table/Miter/Radial Arm
PRO1280CHB**	12"	80	1"	TCG	10˚	.103"	.137"	Table/Miter/Radial Arm
PRO12100CHB**	12"	100	1"	TCG	10˚	.103"	.148"	Table/Miter/Radial Arm
PRO1460CHB†	14"	60	1"	TCG	10˚	.110"	.152"	Stationary
PRO1480CHB†	14"	80	1"	TCG	10˚	.110"	.152"	Stationary
PRO1660CHB†	16"	60	1"	TCG	10˚	.130"	.172"	Stationary
PRO1680CHB†	16"	80	1"	TCG	10˚	.130"	.172"	Stationary
PRO1880CHB†	18"	80	1"	TCG	10˚	.130"	.184"	Stationary

**Also available in bulk box rather than fabric pouch. For bulk blade add a "B" to the catalog # (example. PRO1040CHBB).

Laminate

- For clean cutting of laminates, veneered panels, and melamine
- Special negative hook angle eliminates chipping and extends blade life
- Produce excellent finishes on top and bottom of workpiece

Item #	Diameter	Teeth	Arbor size	Grind Type	Hook Angle	Plate Thickness	Kerf	Tools
PRO1080LAM**	10"	80	5/8"	TCG	-10˚	.086"	.120"	Table/Miter/Radial Arm
PRO1290LAM**	12"	90	1"	TCG	-10˚	.103"	.139"	Table/Miter/Radial Arm
PRO14100LAM†	14"	100	1"	TCG	-10˚	.110"	.144"	Stationary
PRO16100LAM†	16"	100	1"	TCG	-10˚	.130"	.164"	Stationary

**Also available in bulk box rather than fabric pouch. For bulk blade add a "B" to the catalog # (example. PRO1080LAMB).

†Comes in bulk box
‡Comes in folder

Specialty Blades

Precision Dado Sets



- Precision-matched components are roll- and hammer-tensioned by hand for perfectly true running
- Bodies are laser cut from nickel-alloy tool steel, ground and hardened to Rockwell 42-44C for durability and cutting accuracy
- Extra-large teeth with tri-metal shim brazing, CNC sharpened with diamond wheels to a razor-sharp edge

Item #	Diameter	Teeth	Arbor size	Outside blades	1/4" chipper	1/8" chipper	1/16" chipper	Tools
PPRO624DADO	6"	24	5/8"	2	1	2	1	Table/Radial Arm
PRO824DADO	8"	24	5/8"	2	1	2	1	Table/Radial Arm
PRO840DADO	8"	40	5/8"	2	1	2	1	Table/Radial Arm

Solid Surface



- Specially designed 45˚ triple chip grind produces clean cuts in solid surface acrylic and polyester materials
- Tensioned plate provides maximum stability
- Resists deflection for a straight, true cut

Item #	Diameter	Teeth	Arbor size	Grind Type	Hook Angle	Plate Thickness	Kerf	Tools
PRO1060SS**	10"	60	5/8"	SSG	10˚	.086"	.128"	Table/Miter/Radial Arm
PRO1280SS**	12"	80	1"	SSG	10˚	.103"	.145"	Table/Miter/Radial Arm
PRO14100SS†	14"	100	1"	SSG	10˚	.110"	.152"	Stationary

**Also available in bulk box rather than fabric pouch. For bulk blade add a "B" to the catalog # (example. PRO14100SSB).

Fiber Cement



- Diamond impregnated tips last up to 100X longer than standard carbide
- Deep, specially-designed gullets help keep dust to a minimum

Item #	Diameter	Teeth	Arbor size	Grind Type	Hook Angle	Plate Thickness	Kerf	Tools
PRO108FC	10"	8	5/8"	FTG/DIAMOND	10˚	.070"	*	Table/Miter/Radial Arm

Comes in fabric pouch.

Non-Ferrous



- Clean cuts in aluminum, brass, copper & other non-ferrous metals and PVC
- Zero to slightly negative hook angles produce clean cuts without binding in extrusions, tubing or other delicate profiles
- Appropriate cutting lubricant recommended for optimal performance

Item #	Diameter	Teeth	Arbor size	Grind Type	Hook Angle	Plate Thickness	Kerf	Tools
PRO72540NF‡	7-1/4"	40	5/8"D	TCG	0˚	.070"	.103"	Circular
PRO860NF‡	8"	60	5/8"D	TCG	0˚	.086"	.127"	Circular/Table/Miter/Radial Arm
PRO1060NF**	10"	60	5/8"	TCG	0˚	.086"	.120"	Miter/Table/Radial Arm
PRO1080NF**	10"	80	5/8"	TCG	0˚	.086"	.127"	Miter/Table/Radial Arm
PRO1280NF**	12"	80	1"	TCG	0˚	.103"	.144"	Miter/Table/Radial Arm
PRO12100NF**	12"	100	1"	TCG	0˚	.103"	.145"	Miter/Table/Radial Arm
PRO14100NF†	14"	100	1"	TCG	0˚	.110"	.152"	Stationary
PRO15100NF†	15"	100	1"	TCG	-5˚	.086"	.120"	Stationary
PRO16100NF†	16"	100	1"	TCG	0˚	.130"	.172"	Stationary

**Also available in bulk box rather than fabric pouch. For bulk blade add a "B" to the catalog # (example. PRO1060NFB).

Steel Cutting



- Designed for steel plate, angle iron, bar stock or pipe
- Extra hard C6 carbide teeth with 0˚ hook angle produce a fast, clean cut with minimal burrs
- Cooler running, longer life, and less dust and debris than bonded abrasive wheels

Item #	Diameter	Teeth	Arbor size	Grind Type	Hook Angle	Plate Thickness	Kerf	Tools
PRO82540ST†	8-1/4"	48	5/8"D	TCG	0˚	.063	.078"	Circular
PRO948ST†	9"	48	1"	ATB	0˚	.063	.078"	Low RPM Metal Cutting
PRO1048ST†	10"	50	5/8"	TCG	0˚	.070	.087"	Low RPM Metal Cutting
PRO1260ST†	12"	60	1"	TCG	0˚	.070	.087"	Low RPM Metal Cutting
PRO1280ST†	12"	80	1"	TCG	-5˚	.070	.087"	Low RPM Metal Cutting
PRO1480ST†	14"	80	1"	TCG	0˚	.078	.094"	Low RPM Metal Cutting

†Comes in bulk box
‡Comes in folder

Specialty Blades (Continued)

Rescue

- Designed for firefighters and other professionals for fast cutting through shingles, nails, wood and other structural components
- Exceptionally robust teeth with -15˚ hook angle and deep gullets for rapid demolition work in emergency situations
- Use with portable gas-powered saws

Item #	Diameter	Teeth	Arbor size	Grind Type	Hook Angle	Plate Thickness	Kerf	Tools
PRO1212RES**	12"	12	1"	TCG	-15˚	.103"	.144"	Gas Power Saw
PRO1212RES20**	12"	12	20 mm	TCG	-15˚	.103"	.129"	Gas Power Saw
PRO1224RES**	12"	24	1"	TCG	-15˚	.103"	.137"	Gas Power Saw
PRO1224RES20**	12"	24	20 mm	TCG	-15˚	.103"	.135"	Gas Power Saw
PRO1424RES**	14"	24	1"	TCG	-15˚	.110"	.144"	Gas Power Saw

**Also available in bulk box rather than fabric pouch. For bulk blade add a "B" to the catalog # (example. PRO1424RESB).

Nail Cutting

- The remodelers' choice for cutting lumber, flooring and materials where nails are present
- Special triple-chip grind with -10˚ hook angle for longer tooth life than conventional saw blades
- Fully hardened plate resists warp and deflection in heavy use

Item #	Diameter	Teeth	Arbor size	Grind Type	Hook Angle	Plate Thickness	Kerf	Tools
PRO82518NC‡	8-1/4"	18	5/8"D	TCG	-10˚	.086"	.120"	Circular

Stabilizers

- Taper ground for absolute stability - Makes cuts more accurate and dampens sound
- Top quality tool steel
- 2 pieces per set

Item #	Diameter	Arbor size	Thickness	Tools
PROSTAB	4"	5/8"D	1/8"	Table/Stationary

Bosch Precision Woodworking Series

Blades for the value conscious professional. All of our precision series blades have thick, heavy-body plates for minimal runout or blade deflection. Dyanite®, C3 carbide with European-style, extra large, resharpenable teeth provide extra long life and exceptional performance. All blades have laser-cut vibration reduction slots to reduce noise and blade wobble for clean, accurate cuts.

Item #	Diameter	Teeth	Arbor Size	Grind Type	Hook Angle	Plate Thickness	Kerf	Tools	Application
PS712RIP	7-1/4"	12	5/8"D	FTG	20˚	.070"	.114"	Circular	Ripping
PS724GP	7-1/4"	24	5/8"D	ATB	20˚	.070"	.104"	Circular	Rip/Crosscut
PS740GP	7-1/4"	40	5/8"D	ATB	15˚	.070"	.104"	Circular	Finishing
PS740LAM	7-1/4"	40	5/8"D	TCG	15˚	.070"	104"	Circular	Laminates
PS740NF	7-1/4"	40	5/8"D	TCG	15˚	.070"	104"	Circular	Non-Ferrous
PS818NC	8-1/4"	18	5/8"	TCG	-10˚	.086"	.120"	Circular	Nail Cutting
PS840GP	8-1/4"	40	5/8"	ATB	12˚	.086"	.120"	Circular/Table/ Miter/Radial Arm	Rip/Crosscut
PS1024RIP	10"	24	5/8"	FTG	20˚	.086"	.128"	Table/Miter/Radial Arm	Ripping
PS1040GP	10"	40	5/8"	ATB	15˚	.070"	.104"	Table/Miter/Radial Arm	General Purpose
PS1060GP	10"	60	5/8"	ATB	12˚	.086"	.120"	Table/Miter/Radial Arm	Rip/Crosscut
PS1060LAM	10"	60	5/8"	TCG	10˚	.086"	.120"	Table/Miter/Radial Arm	Laminates
PS1060NF	10"	60	5/8"	TCG	10˚	.086"	.120"	Table/Miter/Radial Arm	Non-Ferrous
PS1080FIN	10"	80	5/8"	ATB	12˚	.086"	.120"	Table/Miter/Radial Arm	Finishing
PS1240GP	12"	40	1"	ATB	12˚	.103"	.138"	Table/Miter/Radial Arm	Ripping
PS1260GP	12"	60	1"	ATB	12˚	.103"	.145"	Table/Miter/Radial Arm	Rip/Crosscut
PS1280FIN	12"	80	1"	ATB	12˚	.103"	.145"	Table/Miter/Radial Arm	Finishing

‡Comes in folder

BOSCH Blade Carrying Case

Holds up to 2 blades

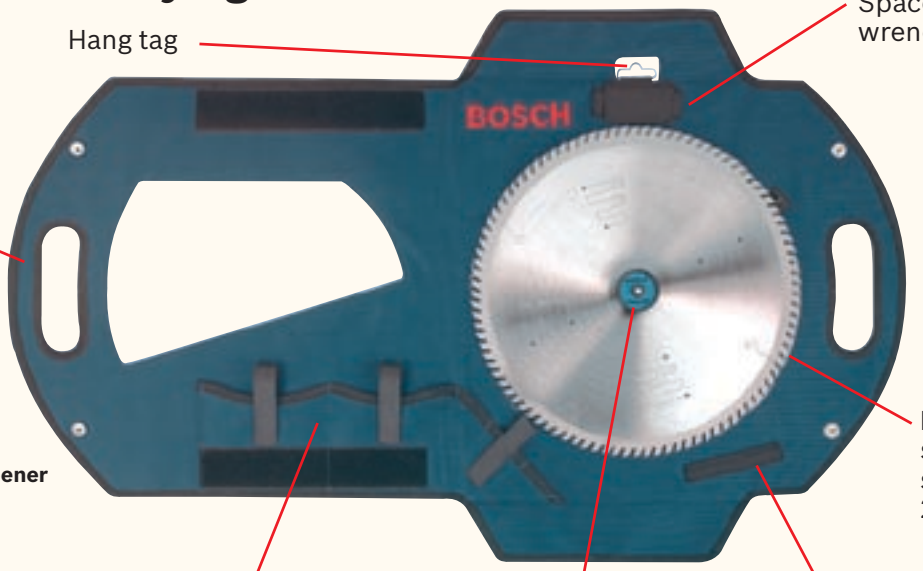

For transport to resharpener

BOSCH Construction / Framing Saw Blades

Dyanite® Carbide

- A process to increase the fracture toughness of the carbide.
- More resistant to heat.
- Carbide 2X larger than competition.
- 6X sharper than standard carbide.

Tri-metal Shim

- A copper / silver alloy shim between the carbide tip and the blade.
- Acts as a shock absorber in tough applications.

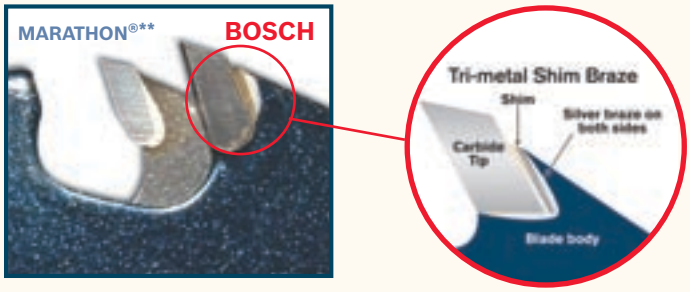

Patented C-3 Dyanite® Carbide Teeth
- Exclusive shock resistant tooth design.
- Diamond ground, sharper from the start.

Expansion Slots
- Reduce blade warping.

Body Slots
- Help keep the blade cooler.

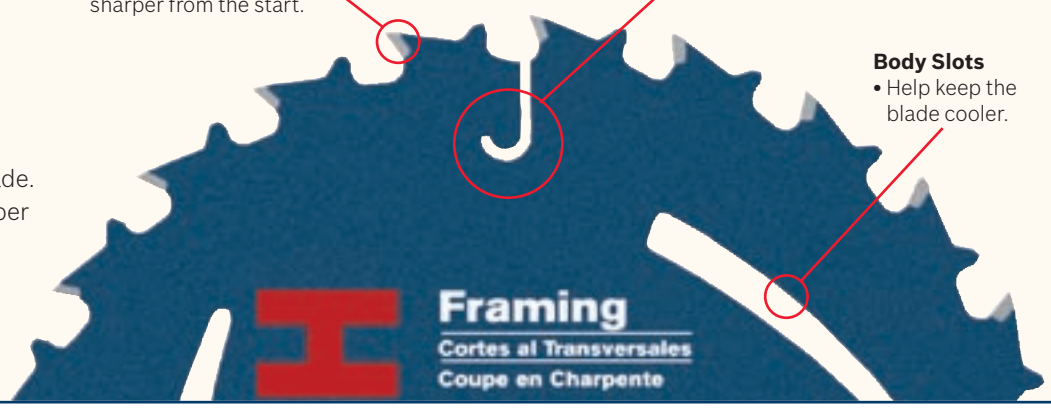

**All other trademarks are owned and/or registered by their respective trademark owners.

Bosch's Construction Series carbide blades have been designed to fit the needs of all framing and trim carpenters. Each blade has a thin-plate that has been hardened to stay flat and run true, cut after cut.

- Patented C-3 Dyanite® carbide teeth are diamond ground to be precision sharp from the start and stay sharp up to 6X longer than standard carbide
- Impact resistant tri-metal shims between each carbide tip and the blade act as shock absorbers in tough applications
- A fully hardened thin kerf plate means less material is removed which allows for a faster cut while still remaining straight and true
- The thin kerf along with anti-friction coating and body slots on high RPM 7-1/4" blades help the blade run cooler
- Expansion slots reduce blade warping
- Fiber Cement blade has Diamond impregnated teeth for extra long life

Item #	Diameter	# of Teeth	Application	Arbor	Hook Angle	Kerf	Plate Thickness	Tooth Design	Tool Type	Max. RPM	Quantity
CB718AB10	7-1/4"	18	Ripping	5/8" ◊	20°	0.068"	0.045"	ATB	Portable / worm drive	7,900	10
CB718AB25	7-1/4"	18	Ripping	5/8" ◊	20°	0.068"	0.045"	ATB	Portable / worm drive	7,900	25
CB724AB	7-1/4"	24	Framing	5/8" ◊	20°	0.068"	0.045"	ATB	Portable / worm drive	7,900	1
CB724AB10	7-1/4"	24	Framing	5/8" ◊	20°	0.068"	0.045"	ATB	Portable / worm drive	7,900	10
CB724AB25	7-1/4"	24	Framing	5/8" ◊	20°	0.068"	0.045"	ATB	Portable / worm drive	7,900	25
CB740AB	7-1/4"	40	Finishing	5/8" ◊	20°	0.068"	0.045"	ATB	Portable / worm drive	7,900	1
CB740AB10	7-1/4"	40	Finishing	5/8" ◊	20°	0.068"	0.045"	ATB	Portable / worm drive	7,900	10
WD724B10	7-1/4"	24	Framing	◊	20°	0.068"	0.045"	ATB	Worm drive	7,900	10
WD740B10	7-1/4"	40	Finishing	◊	20°	0.068"	0.045"	ATB	Worm drive	7,900	10
CB704FC	7-1/4"	4	Fiber cement	5/8" ◊	10°	0.098"	0.07"	FT/ DIAMOND	Portable / worm drive	7,900	1
CB748ST	7-1/4"	48	Ferrous and non-ferrous metal cutting	5/8" ◊	0°	0.079"	0.065"	ATB	Portable / worm drive	7,900	1
CB714NC	7-1/4"	14	Nail cutting / Remodeling	5/8" ◊					Portable / worm drive	7,900	1
CB824	8-1/4"	24	Rip / crosscutting	5/8" ◊	20°	0.092"	0.07"	ATB	Portable / worm drive	6,900	1
CB1024	10"	24	Fast ripping	5/8"	20°	0.098"	0.07"	ATB	Miter / table	6,000	1
CB1040	10"	40	General purpose	5/8"	13°	0.098"	0.07"	ATB	Miter / table	6,000	1
CB1060	10"	60	Crosscutting	5/8"	13°	0.098"	0.07"	ATB	Miter / table	6,000	1
CB1060L	10"	60	Fine crosscutting	5/8"	0°	0.098"	0.07"	FT	Miter / table	6,000	1
CB1080	10"	80	Ultra fine crosscutting	5/8"	0°	0.098"	0.07"	ATB	Miter / table / radial arm	6,000	1
CB1240	12"	40	Crosscutting	1"	10°	0.098"	0.07"	ATB	Miter / table	4,700	1
CB1260	12"	60	Fine crosscutting	1"	0°	0.098"	0.07"	FT	Miter / table	4,700	1
CB1280	12"	80	Ultra fine crosscutting	1"	0°	0.098"	0.07"	ATB	Miter / table / radial arm	4,700	1

Cordless Series Circular Saw Blades

Bosch offers cordless circular saw blades for both general purpose and fast cutting applications.

- CBCL524A and CBCL624A are blades for general purpose cutting in wood and plastic
- Use CBCL518A and CBCL618A for fast cutting and rough cut off in wood and wood composites
- CBCL1024, CBCL1040 and CBCL1060 are blades designed specifically for use in cordless miter saws and include tooth configurations for fast cutting and fine finish work

Item #	Blade Diameter	# of Teeth	Arbor	Hook Angle	Kerf	Max. RPM
CBCL518A	5-3/8"	18	10mm	25°	.063"	4,800
CBCL524A	5-3/8"	24	10mm	22°	.063"	4,800
CBC618A	6-1/2"	18	5/8"	25°	.063"	4,800
CBCL624A	6-1/2"	24	5/8"	22°	.063"	4,800
CBCL1024	10"	24	5/8"	10°	.079"	5,000
CBCL1040	10"	40	5/8"	10°	.079"	5,000
CBCL1060	10"	60	5/8"	10°	.079"	5,000

Bosch now offers a high-tension hacksaw frame and selection of bi-metal and carbon steel blades. With a cutting capacity of up to 4-3/4" and 45- and 90- degree cutting capabilities, the 12" frame is designed for heavy use in tough applications encountered on the jobsite.

Bosch hacksaw blades include bi-metal and carbon steel blades in 10" and 12" lengths for various materials including wood, plastic and machinable metals, and a carbide grit blade in 10" and 12" for abrasive materials including ceramics and fiberglass.

Hacksaw Frame

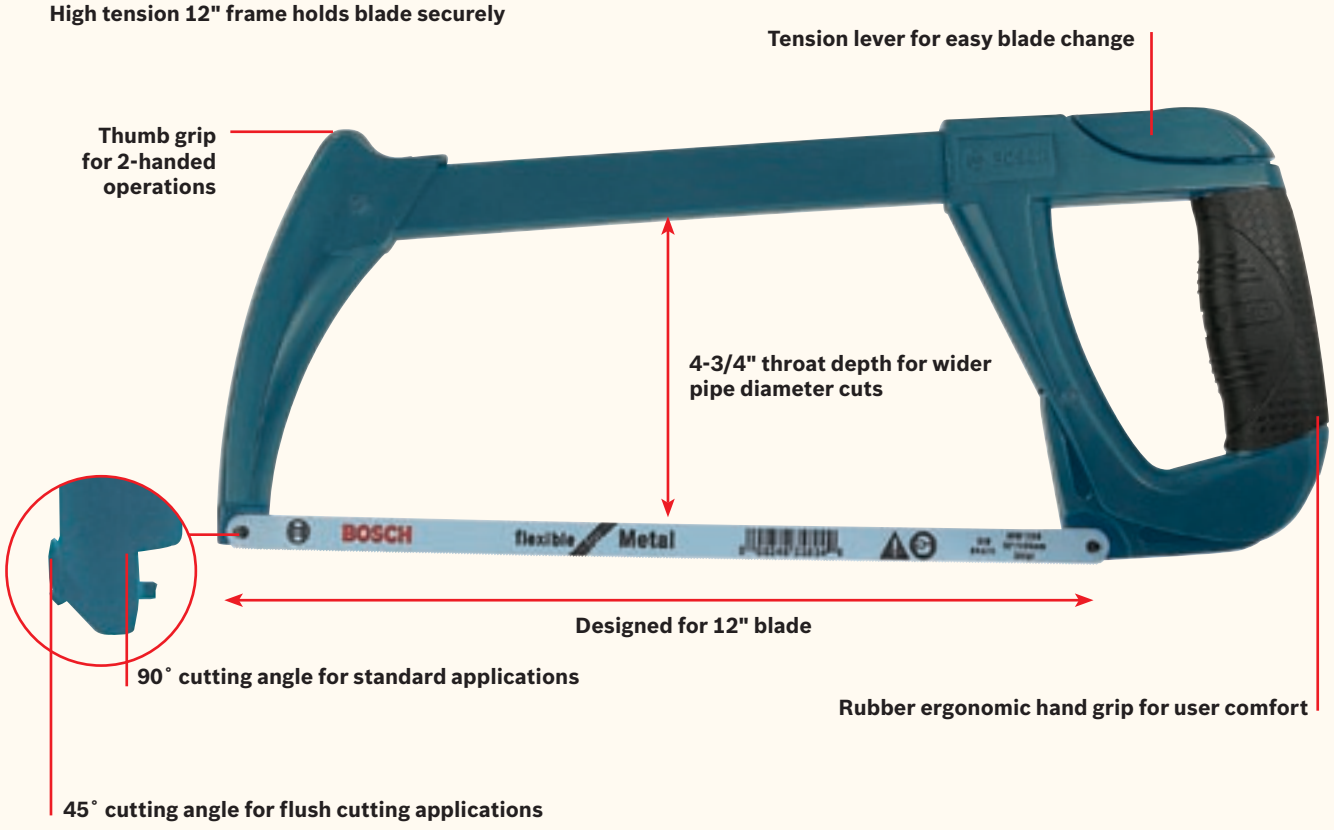
High tension 12" frame holds blade securely
Tension lever for easy blade change
Thumb grip for 2-handed operations
4-3/4" throat depth for wider pipe diameter cuts
BOSCH
flexible
Metal
Designed for 12" blade
90˚ cutting angle for standard applications
Rubber ergonomic hand grip for user comfort
45˚ cutting angle for flush cutting applications

Hacksaw Frame

Item #	Description	Frame Dimensions
BHF1202	12" Hacksaw Frame	15-1/2" L X 6-1/2" W X 1" H

Hacksaw Blades / Band Saw Blades

Bi-metal Hacksaw Blades

Ideal for cutting pipe, solid metals, wood, plastic, or machinable metal

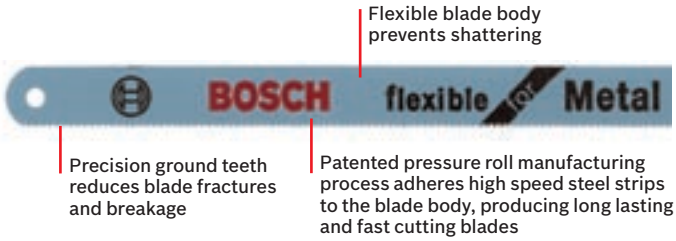
Flexible blade body prevents shattering
BOSCH
flexible
for
Metal
Precision ground teeth reduces blade fractures and breakage
Patented pressure roll manufacturing process adheres high speed steel strips to the blade body, producing long lasting and fast cutting blades

Item #	Description	TPI	Pack Qty
HFM1018	10" Bi-metal Hacksaw Blade	18	10
HFM1024	10" Bi-metal Hacksaw Blade	24	10
HFM1032	10" Bi-metal Hacksaw Blade	32	10
HFM1218	12" Bi-metal Hacksaw Blade	18	10
HFM1224	12" Bi-metal Hacksaw Blade	24	10
HFM1232	12" Bi-metal Hacksaw Blade	32	10
HFM1018-100pk	10" Bi-metal Hacksaw Blade	18	100
HFM1024-100pk	10" Bi-metal Hacksaw Blade	24	100
HFM1032-100pk	10" Bi-metal Hacksaw Blade	32	100
HFM1218-100pk	12" Bi-metal Hacksaw Blade	18	100
HFM1224-100pk	12" Bi-metal Hacksaw Blade	24	100
HFM1232-100pk	12" Bi-metal Hacksaw Blade	32	100

High Carbon Steel Hacksaw Blades

Ideal for cutting mild steel, copper, brass, aluminum and other like materials

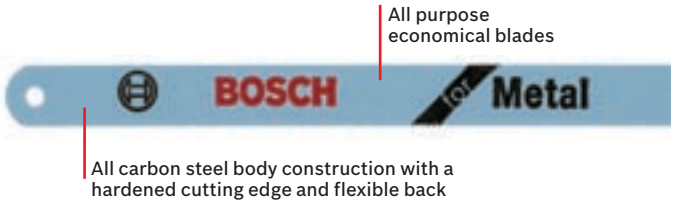
All purpose economical blades
BOSCH
for
Metal
All carbon steel body construction with a hardened cutting edge and flexible back

Item #	Description	TPI	Pack Qty
HBM1018	10" Carbon Steel Hacksaw Blade	18	10
HBM1024	10" Carbon Steel Hacksaw Blade	24	10
HBM1032	10" Carbon Steel Hacksaw Blade	32	10
HBM1218	12" Carbon Steel Hacksaw Blade	18	10
HBM1224	12" Carbon Steel Hacksaw Blade	24	10
HBM1232	12" Carbon Steel Hacksaw Blade	32	10
HBM1018-100pk	10" Carbon Steel Hacksaw Blade	18	100
HBM1024-100pk	10" Carbon Steel Hacksaw Blade	24	100
HBM1032-100pk	10" Carbon Steel Hacksaw Blade	32	100
HBM1218-100pk	12" Carbon Steel Hacksaw Blade	18	100
HBM1224-100pk	12" Carbon Steel Hacksaw Blade	24	100
HBM1232-100pk	12" Carbon Steel Hacksaw Blade	32	100

Carbide Grit Hacksaw Blades

Ideal for cutting ceramics, fiberglass, plastics, asbestos, glass resins and other abrasive materials

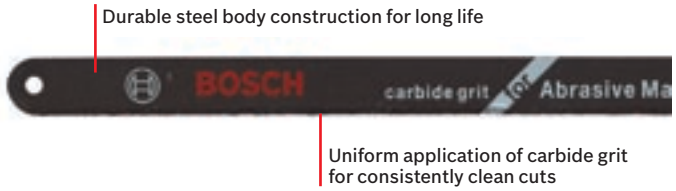
Durable steel body construction for long life
BOSCH
carbide grit
Uniform application of carbide grit for consistently clean cuts

Item #	Description	TPI	Pack Qty
HSC10-3pk	10" Carbide Grit Hacksaw Blade	grit	3
HSC12-3pk	12" Carbide Grit Hacksaw Blade	grit	3

Portable Band Saw Blades

- Bi-metal blades for wood, plastic and most metals
- Blades fit most portable band saws
- Blades are made in the USA

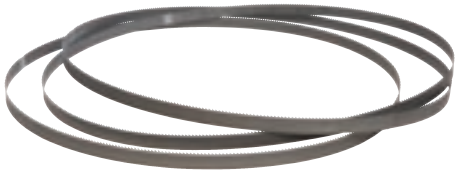

Item #	Length (in)	TPI	Pack Qty
PTB4410	44-7/8"	10	3
PTB4414	44-7/8"	14	3
PTB4418	44-7/8"	18	3
PTB4424	44-7/8"	24	3